



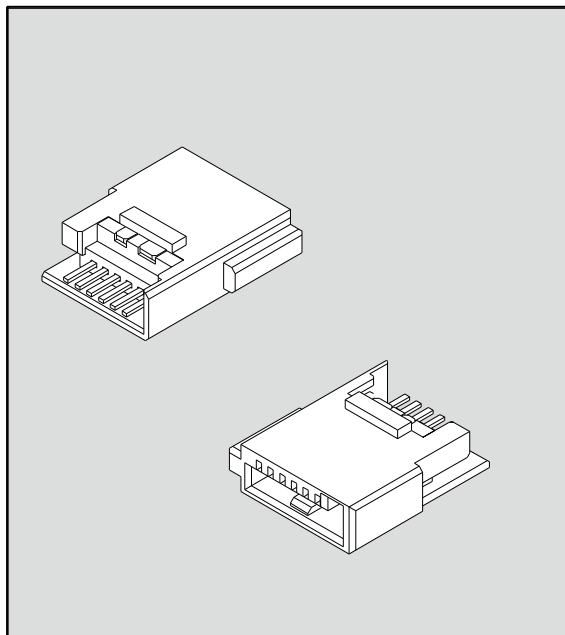

Assembly Layout

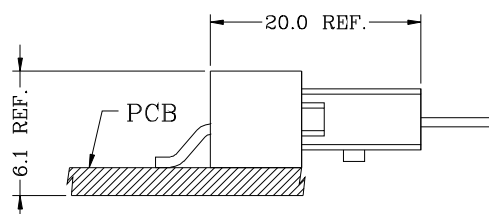

Specifications:

Poles	6 Poles
Pitch between poles	1.00mm
Rated Voltage	30V AC,DC
Rated Current	1.5A (MAX)
Withstand Voltage	300V AC/minute
Contact Resistance	30mΩ (MAX.)
Insulation Resistance	100MΩ (MIN.)
Temperature Range	-40°~+85°C
Applicable Wire Range	AWG #18~#28



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

A1009 Series 1.00mm pitch SATA female connector



Features:

- * Material: Insulator: Nylon 66 UL 94V-0 (Black)
Contact Post: 0.25mm^t Phosphor Bronze, Gold Plated.
- * JWT Part No.: A1009HS0-A6P-HF

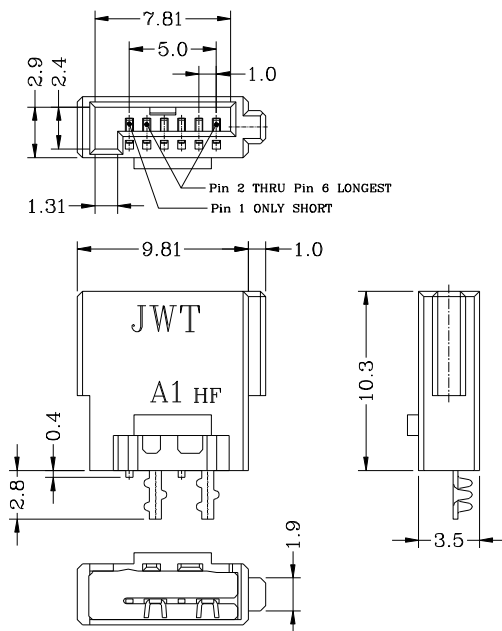

A1009 Series 1.00mm pitch SATA female connector

Features:

- * Material: Insulator: Nylon 66 / PBT UL 94V-0 +30%G.F (Black)
Contact Post: 0.25mm^t Phosphor Bronze, Gold Plated.
- * JWT Part No.: A1009HS0-6P-**

