



A

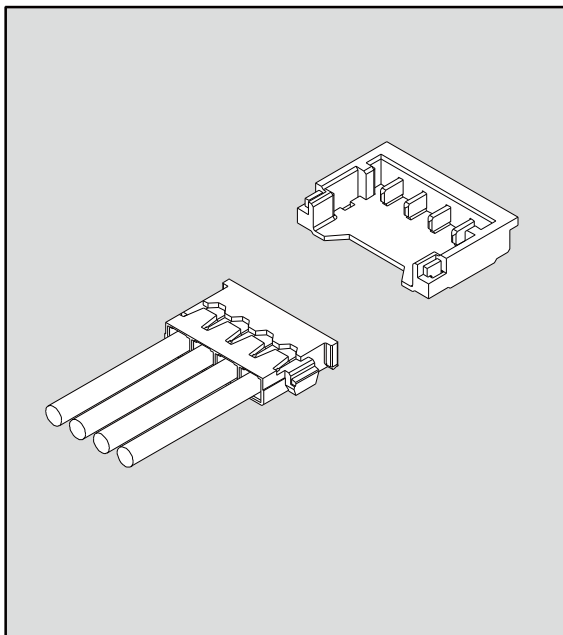

Assembly Layout

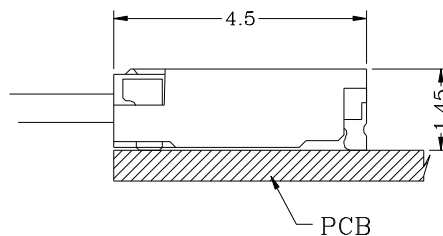

Specifications:

Poles	2~6 Poles
Pitch between poles	1.20mm
Rated Voltage	50V AC,DC
Rated Current	1A (AWG #30) 1.5A (AWG #28)
Withstand Voltage	500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	100MΩ (MIN.)
Temperature Range	-25°~ +85°C
Applicable Wire Range	AWG #28~#30



RoHS II-specification and
Halogen-free products.

Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.


A1201 Series 1.20mm pitch crimp terminal socket



Features:

- * Material : LCP UL 94V-0 (Black)
- * Suitable for JWT A1201 series terminal
- * JWT P/N : A1201H00-NP

A

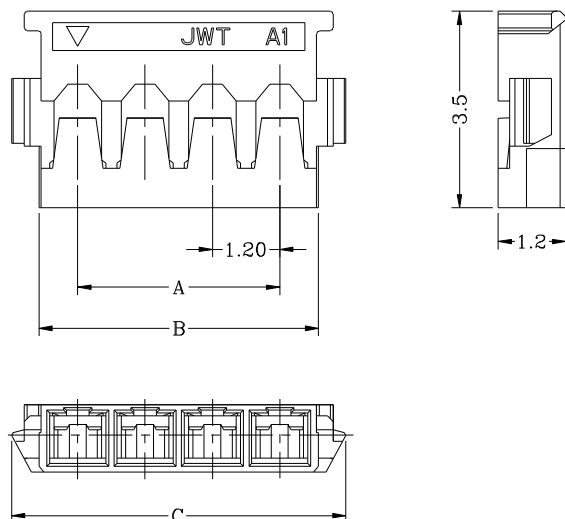


Dimensional & Ordering Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	1.2	2.58	3.55	1000
3	2.4	3.78	4.75	1000
4	3.6	4.98	5.95	1000
5	4.8	6.18	7.15	1000
6	6.0	7.38	8.35	1000

A1201 Series 1.20mm pitch crimp terminal

Features:


- * Used in JWT A1201 series socket

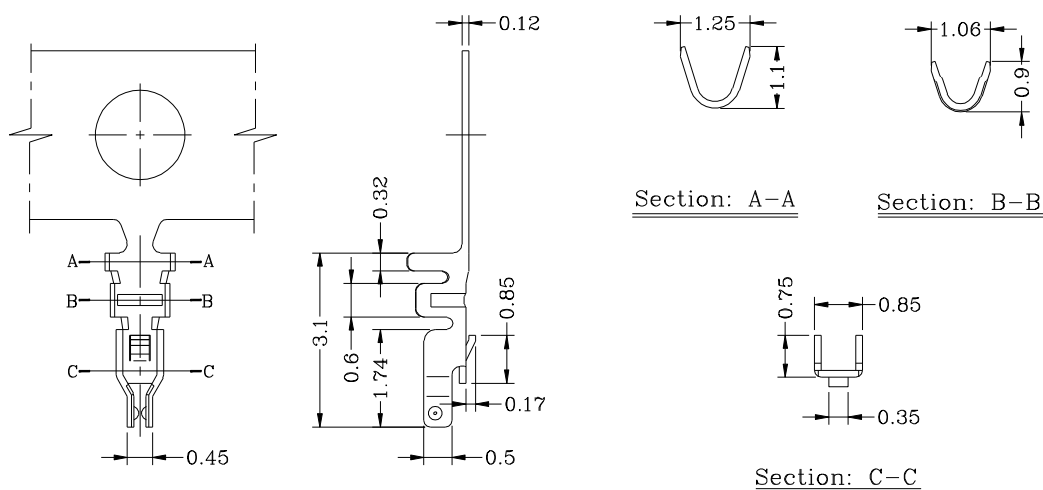

Specification & Ordering Information:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1201TOP-0*	AWG #28~#30	0.88mm(max)	Phosphor bronze	Au over Nickel	20,000 pcs


Note: * (eg. 0, A, B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.



A1201 Series 1.20mm pitch (R-SMT) wafer

Features:

- * Material : Insulator: LCP UL 94V-0 (Black)
Contact Post: 0.20mm^t Brass, Au-plated(Au over Nickel)
Solder Tab: 0.20mm^t Brass, Matte Tin-Plated
- * Mates with JWT A1201 series socket
- * JWT P/N : A1201WR0-NPS

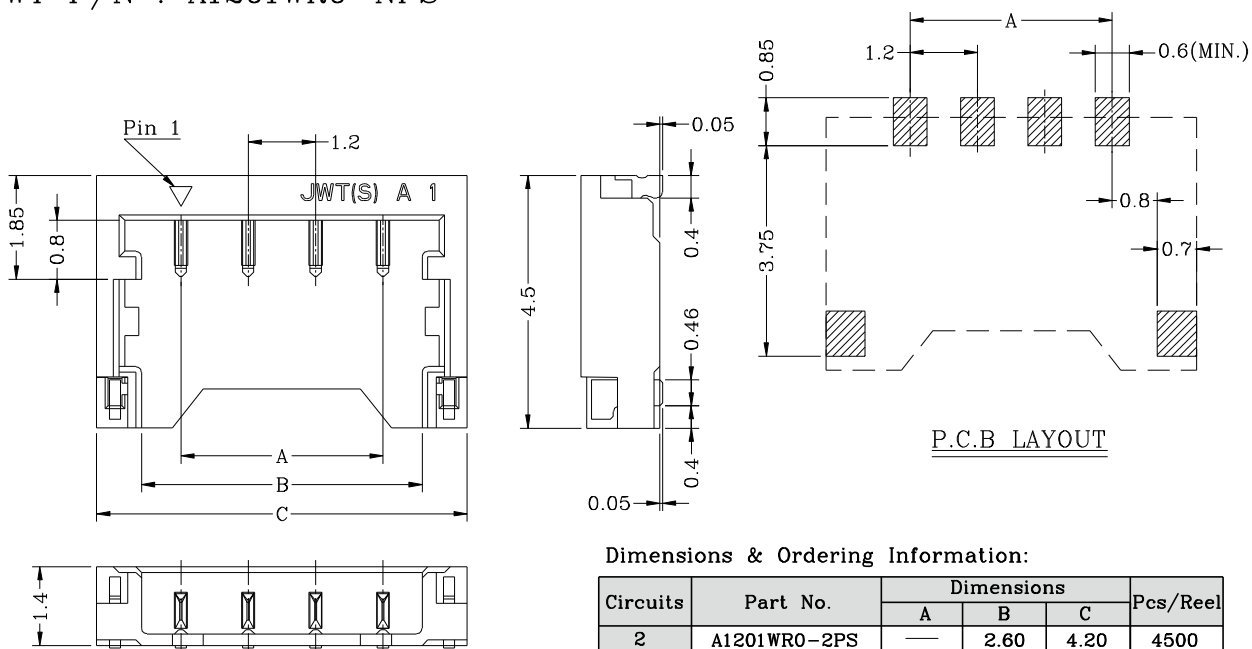

Dimensions & Ordering Information:

Circuits	Part No.	Dimensions			Pcs/Reel
		A	B	C	
2	A1201WR0-2PS	—	2.60	4.20	4500
3	A1201WR0-3PS	2.40	3.80	5.40	4500
4	A1201WR0-4PS	3.60	5.00	6.60	4500
5	A1201WR0-5PS	4.80	6.20	7.80	4500
6	A1201WR0-6PS	6.00	7.40	9.00	4500