



A

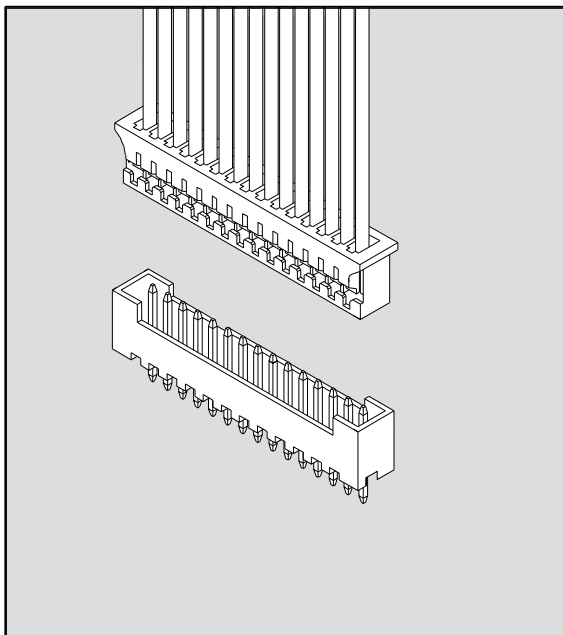

Assembly Layout



Specifications:

Poles	2~15 Poles
Pitch between poles	1.25mm
Rated Voltage	100V AC,DC
Rated Current	1A (AWG #28)
Withstand Voltage	800V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	100MΩ (MIN.)
Temperature Range	-40°~+70°C
Applicable Wire Range	AWG #28~#32



RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.




A1253 Series 1.25mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT A1253 series terminal
- * JWT P/N : A1253H00-NP-**

A

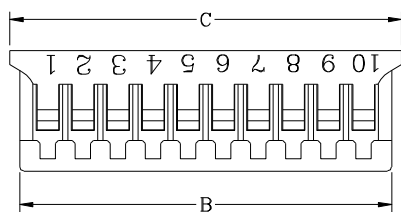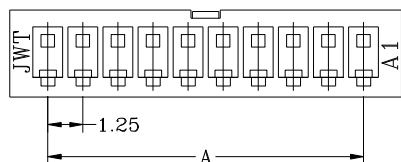




Dimensional & Ordering Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	1.25	3.25	3.95	1000
3	2.50	4.50	5.20	1000
4	3.75	5.75	6.45	1000
5	5.00	7.00	7.70	1000
6	6.25	8.25	8.95	1000
7	7.50	9.50	10.20	1000
8	8.75	10.75	11.45	1000
9	10.00	12.00	12.70	1000
10	11.25	13.25	13.95	1000
11	12.50	14.50	15.20	1000
12	13.75	15.75	16.45	1000
13	15.00	17.00	17.70	1000
14	16.25	18.25	18.95	1000
15	17.50	19.50	20.20	1000


A1253 Series 1.25mm pitch crimp terminal

Features:


- * Used in JWT A1253 series socket

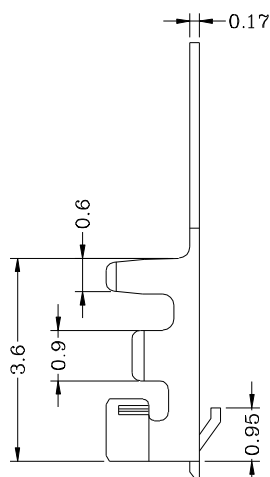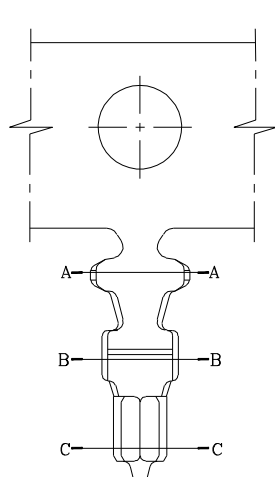

Section A-A



Section B-B



Section C-C

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1253TOP-2	AWG #28~#32	1.00mm(max)	Phosphor bronze	Tin-plated	20,000 pcs