



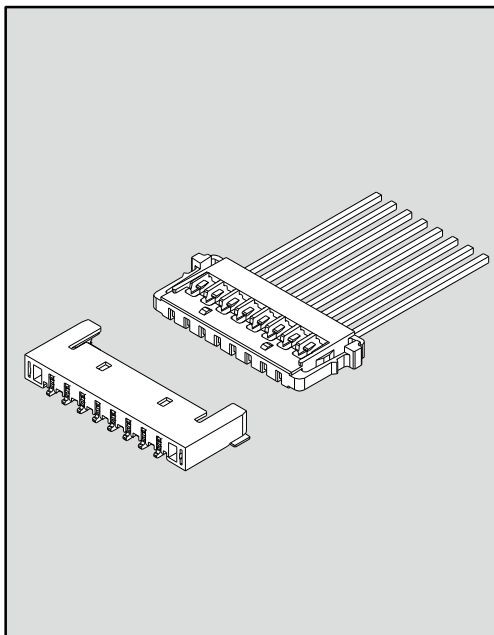

Assembly Layout

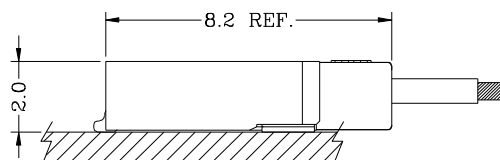

Specifications:

Poles	6~10 Poles
Pitch between poles	1.50mm
Rated Voltage	150V AC,DC
Rated Current	3A (AWG #24/less than 7 circuits)
	2A (AWG #24/more than 7 circuits)
	2A (AWG #26)
	1.5A (AWG #28)
Withstand Voltage	500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-25°~ +85°C
Applicable Wire Range	AWG #24~ #28



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

A1503 Series 1.50mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (Black)
- * Suitable for JWT A1503 series terminal
- * JWT P/N : A1503H00-NP

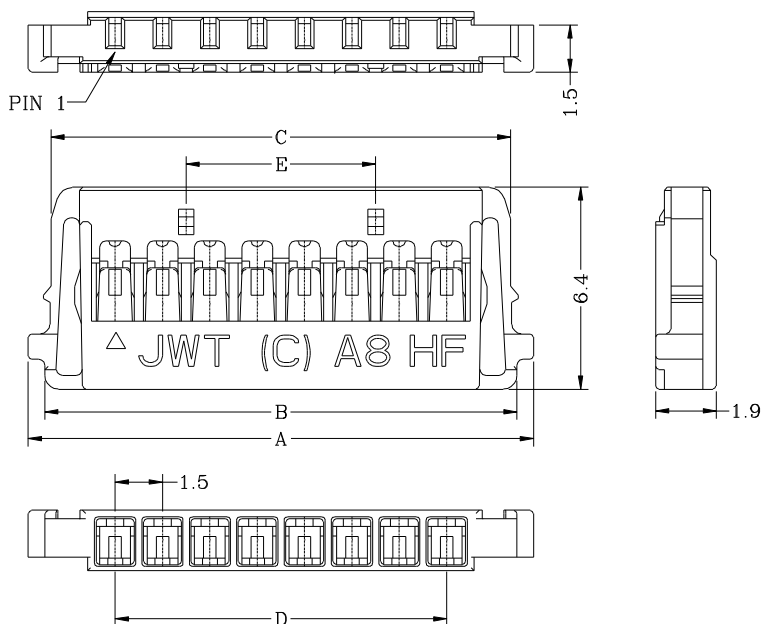


Dimensional & Ordering Information:

Circuits	Dimensions					Pcs/Bag
	A	B	C	D	E	
6	13.0	11.95	11.55	7.5	3.0	1000
8	16.0	14.95	14.55	10.5	6.0	1000
10	19.0	17.95	17.55	13.5	9.0	1000

A1503 Series 1.50mm pitch crimp terminal

Features:

- * Used in JWT A1503 series socket

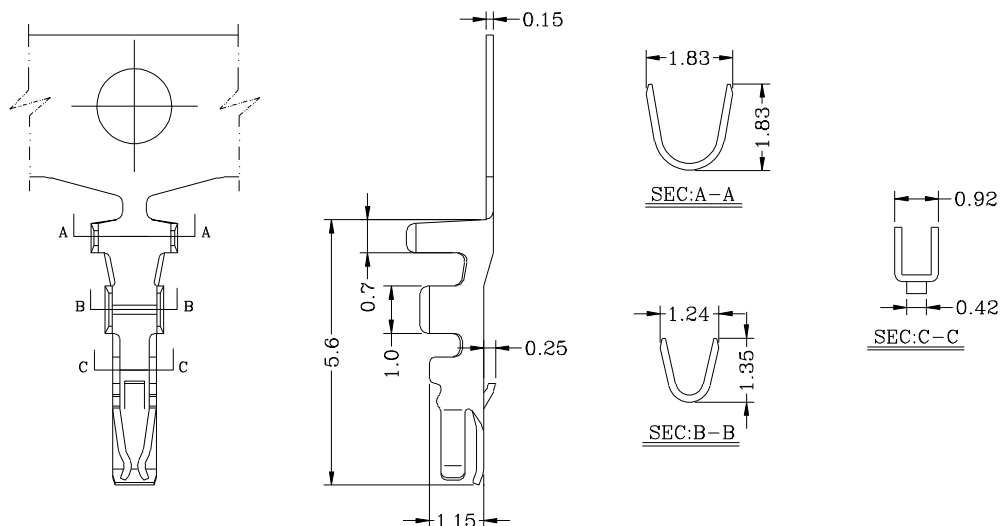

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A1503T0P-0*+	AWG #24~#28	1.10mm(max)	Phosphor bronze	Au over Nickel	20,000 PCS




A1503 Series 1.50mm pitch (R-SMT) wafer

Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
Contact Post: 0.30mm^t Phosphor Bronze, Gold Flash-plated
Solder Tab: 0.15mm^t Phosphor Bronze, Matte Tin-plated
- * Suitable for JWT A1503 series socket
- * JWT P/N : A1503WR0-NPS-**

A

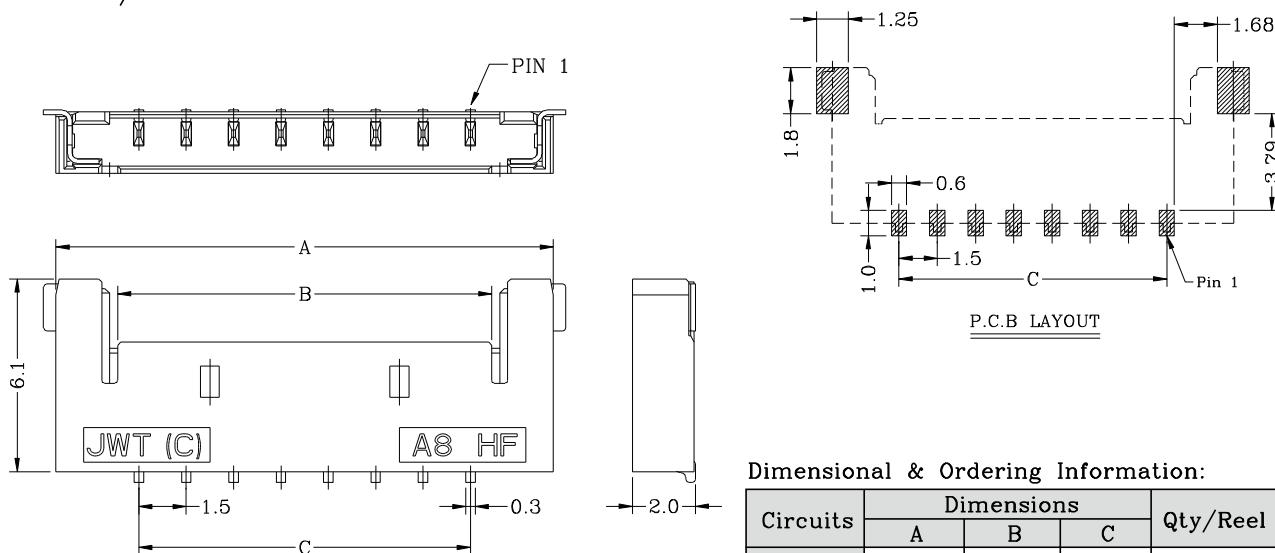

Dimensional & Ordering Information:

Circuits	Dimensions			Qty/Reel
	A	B	C	
6	12.75	8.85	7.50	2000
8	15.75	11.85	10.50	2000
10	18.75	14.85	13.50	2000