



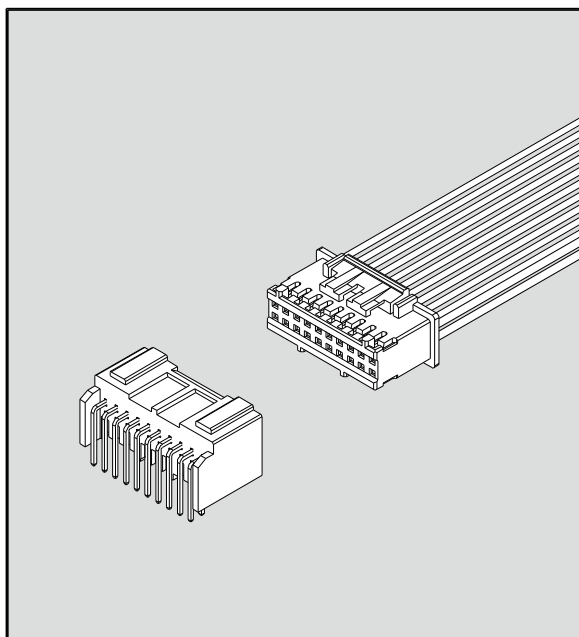

Assembly Layout



A

Specifications:

Poles	20 Poles
Pitch between poles	2.00mm
Rated Voltage	250V AC,DC
Rated Current	3A (AWG #22)
Withstand Voltage	800V AC/minute
Contact Resistance	10mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+85°C
Applicable Wire Range	AWG #22~#26

 UL Recognized No. E144544

 RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.


A2015 Series 2.00mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT A2015 series terminal
- * JWT P/N : A2015H00-2x10P


A

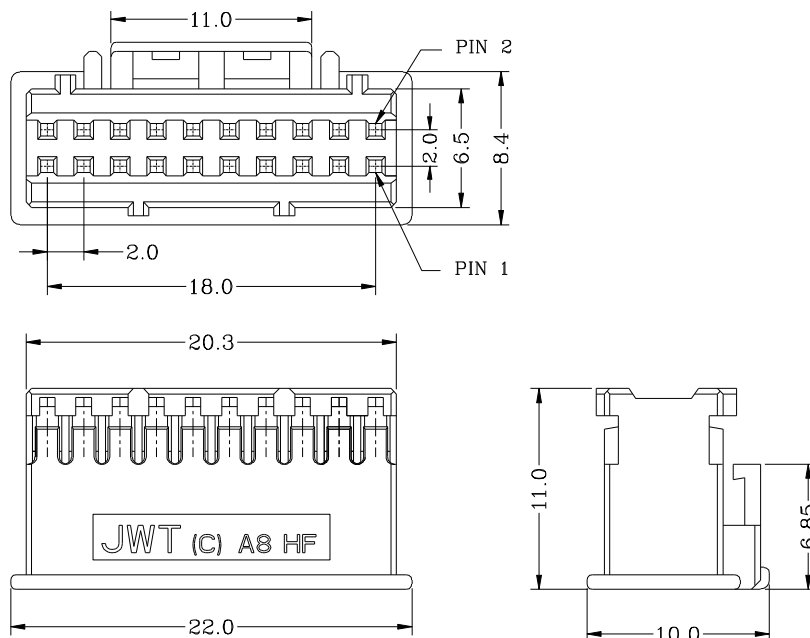

A2015 Series 2.00mm pitch crimp terminal

Features:

- * Used in JWT A2015 series socket

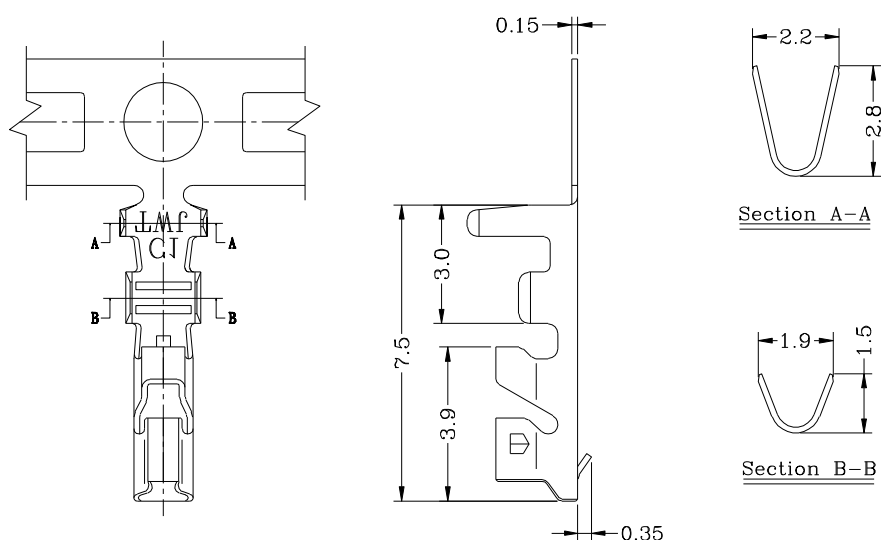



Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A2015T0P-2	AWG# 22~26	ø1.50mm(max)	Phosphor bronze	Tin Plated	10,000 pcs

A2015 Series 2.00mm pitch (R-DIP) wafer



Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
Contact Post: □ 0.50mm Brass, Matte Tin-plated
- * Suitable for JWT A2015 series socket
- * JWT P/N : A2015WR0-2x10P

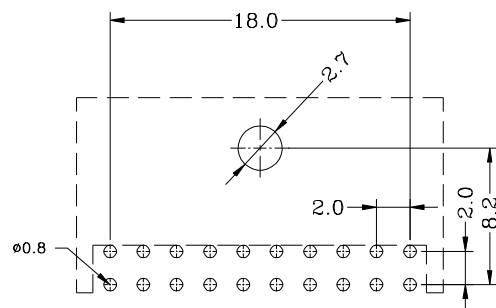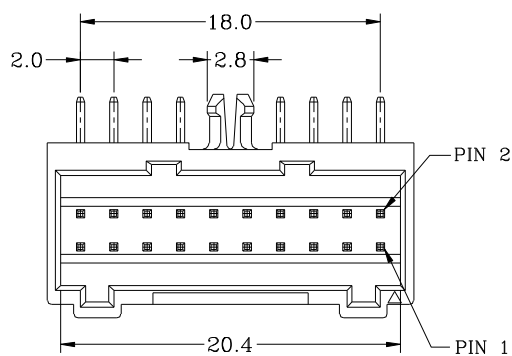

P.C.B LAYOUT

