



A

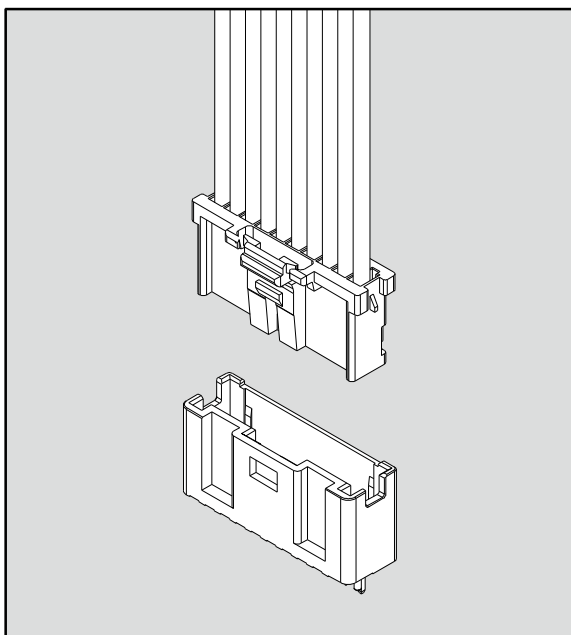

Assembly Layout

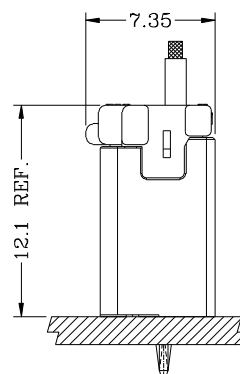

Specifications:


Poles	2~10 Poles
Pitch between poles	2.00mm
Rated Voltage	100V AC,DC
Rated Current	3A (AWG #22)
Withstand Voltage	800V AC/minute
Contact Resistance	10mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+85°C
Applicable Wire Range	AWG #22~#26



RoHS II-specification and
Halogen-free products.



Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

A2017 Series 2.00mm pitch crimp terminal socket




Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT A2015 series terminal
- * JWT P/N : A2017H00-NP

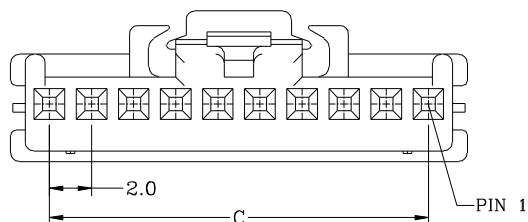

2P

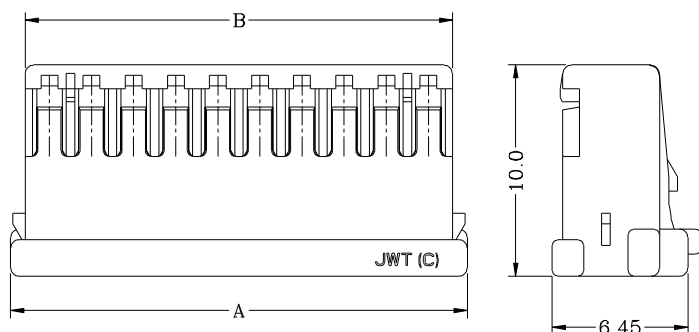





Dimensional & Ordering Information:

Circuits	Part No	Dimensions			Pcs/Bag
		A	B	C	
2	A2017H00-2P	5.7	4.3	2.00	1000
3	A2017H00-3P	7.7	6.3	4.00	1000
4	A2017H00-4P	9.7	8.3	6.00	1000
5	A2017H00-5P	11.7	10.3	8.00	1000
7	A2017H00-7P	15.7	14.3	12.00	1000
8	A2017H00-8P	17.7	16.3	14.00	1000
10	A2017H00-10P	21.7	20.3	18.00	1000

A2017 Series 2.00mm pitch (V-DIP Boss-type) wafer

Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
Contact Post: □ 0.50mm Brass, Tin-plated
- * Mates with JWT A2017 series socket
- * JWT P/N : A2017WV0-NP

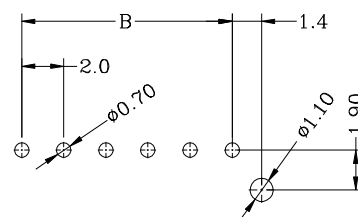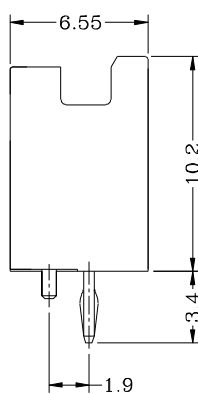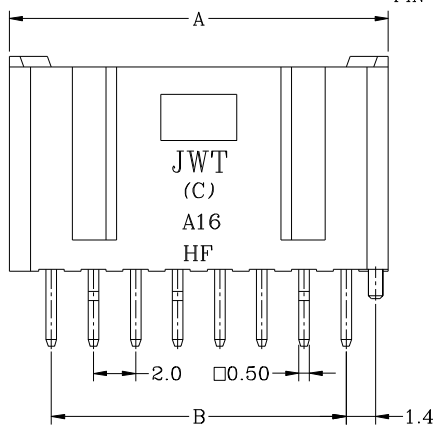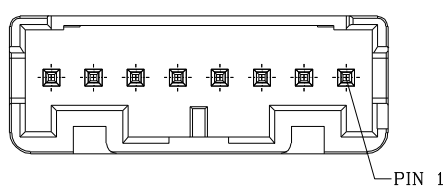

P.C.B LAYOUT

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		Pcs/Bag
		A	B	
2	A2017WV0-2P	6.0	2.00	1000
3	A2017WV0-3P	8.0	4.00	1000
4	A2017WV0-4P	10.0	6.00	500
5	A2017WV0-5P	12.0	8.00	500
7	A2017WV0-7P	16.0	12.00	300
8	A2017WV0-8P	18.0	14.00	250
10	A2017WV0-10P	22.0	18.00	250