



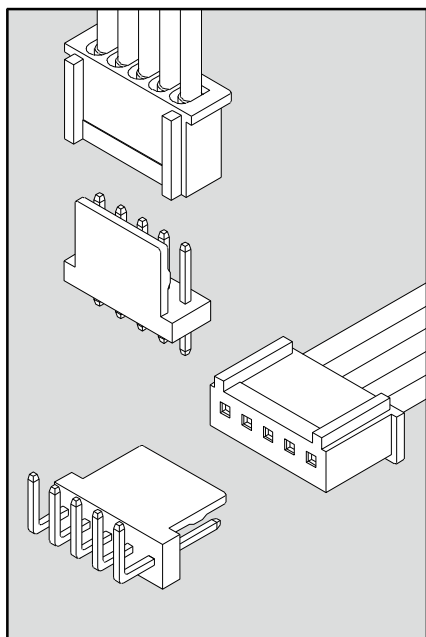


Assembly Layout

Straight Angle (V-Type)



Right Angle (R-Type)



Specifications:

Poles	2~20 Poles
Pitch between poles	2.50mm
Rated Voltage	250V AC,DC
Rated Current	2.5A (AWG #22)
Withstand Voltage	800V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25~+85°C
Applicable Wire Range	AWG #22~#28

 UL Recognized No. E144544


 RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

A2504 Series 2.50mm pitch crimp terminal socket

Features:

- * Material : Nylon 66 UL 94V-0 (Dirty White)
- * Suitable for JWT A2504 series terminal
- * JWT P/N : A2504H00-NP

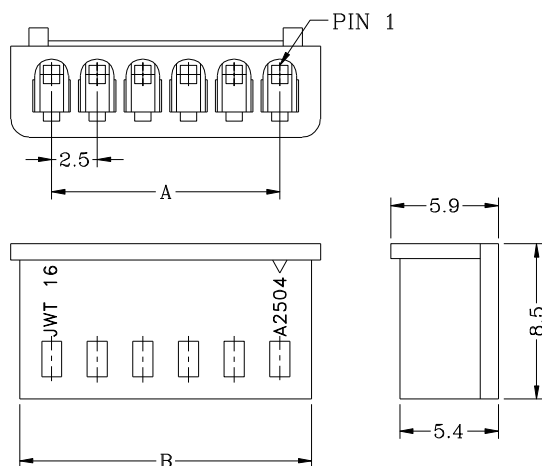


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	2.5	6.0	1000
3	5.0	8.5	1000
4	7.5	11.0	1000
5	10.0	13.5	1000
6	12.5	16.0	1000
7	15.0	18.5	1000
8	17.5	21.0	1000
9	20.0	23.5	1000
10	22.5	26.0	1000
11	25.0	28.5	1000
12	27.5	31.0	1000
13	30.0	33.5	1000
14	32.5	36.0	1000
15	35.0	38.5	1000
16	37.5	41.0	1000
17	40.0	43.5	1000
18	42.5	46.0	1000
19	45.0	48.5	1000
20	47.5	51.0	1000

A2504 Series 2.50mm pitch crimp terminal

Features:

- * Used in JWT A2504 series socket

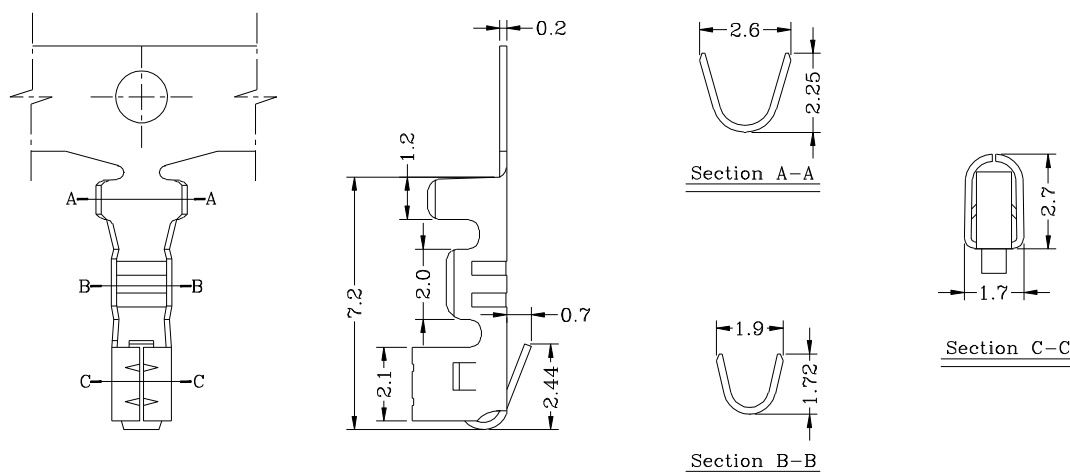

Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A2504T0*-2	AWG #22~#28	1.75mm(max)	Brass or P. Bronze	Tin-plated	8,000 PCS