
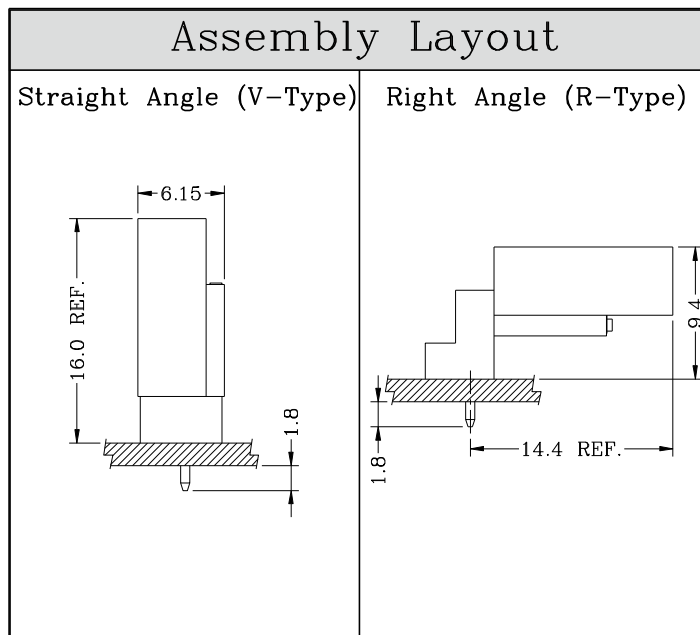


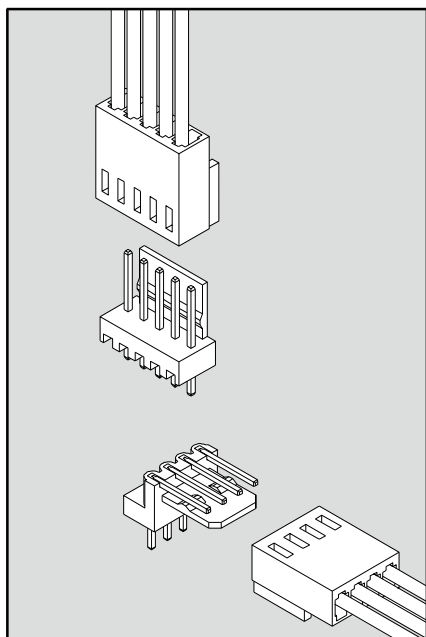

A

Connector Product Number

A2508 ** # -NP * - ** - **					
①	②	③	④	⑤	⑥
① Series No : A2508	② Connection Type H0 : Terminal socket WV : Straight-angle wafer WR : Right-angle wafer		④ No. of contacts (NP) NP : Single row	⑥ Contact Post finish (Blank) : As specified 5e : Matte-tin over Nickel 0* : Gold over Nickel	
③ Flame Class 0 : UL Rated 94V-0			⑤ Product color Blank : As specified (A~Z) : Other colors		
			⑥ Insulating material 6T : Nylon 6T UL 94V-0	⑥ Void circuit / Others (A~Z)# : Void pin	

Note: * (eg. 0, A, B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.

Specifications:

Poles	2~20 Poles
Pitch between poles	2.50mm
Rated Voltage	250V AC,DC
Rated Current	3A (AWG #22)
Withstand Voltage	1500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+85°C


 UL Recognized No. E144544

 CSA Certified No. LR78619

 RoHS II-specification and Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

A2508 Series 2.50mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT A2543 series terminal
- * JWT P/N : A2508H00-NP

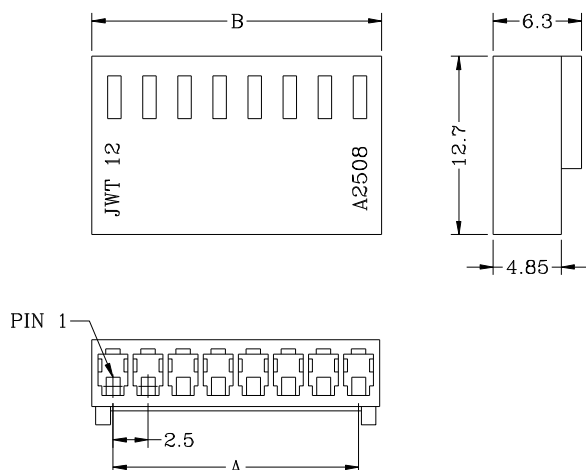


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	2.5	5.5	1000
3	5.0	8.0	1000
4	7.5	10.5	1000
5	10.0	13.0	1000
6	12.5	15.5	1000
7	15.0	18.0	1000
8	17.5	20.5	1000
9	20.0	23.0	1000
10	22.5	25.5	1000
11	25.0	28.0	1000
12	27.5	30.5	500
13	30.0	33.0	500
14	32.5	35.5	500
15	35.0	38.0	500
16	37.5	40.5	500
17	40.0	43.0	500
18	42.5	45.5	500
19	45.0	48.0	500
20	47.5	50.5	500

A2508 Series 2.50mm pitch (V-DIP) wafer

Features:

- * Material : Insulator: Nylon 66 UL 94V-0 (White)
Contact Post: □0.64mm Brass, Tin-plated
- * Mates with JWT A2508 series socket
- * JWT P/N : A2508WV0-NP-**

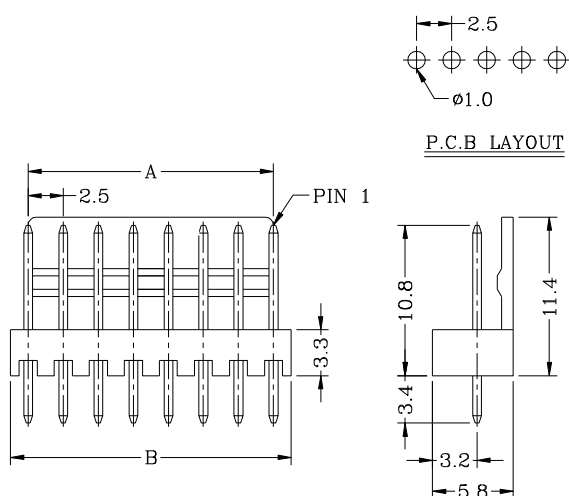


Dimensional Information:

Circuits	Dimensions		PCS/BAG
	A	B	
2	2.5	5.0	1000
3	5.0	7.5	1000
4	7.5	10.0	1000
5	10.0	12.5	1000
6	12.5	15.0	1000
7	15.0	17.5	1000
8	17.5	20.0	1000
9	20.0	22.5	1000
10	22.5	25.0	1000
11	25.0	27.5	500
12	27.5	30.0	500
13	30.0	32.5	500
14	32.5	35.0	500
15	35.0	37.5	500
16	37.5	40.0	500
17	40.0	42.5	250
18	42.5	45.0	250
19	45.0	47.5	250
20	47.5	50.0	250

Features:

- * Material : Insulator: Nylon 66 UL 94V-0 (White)
Contact Post: □0.64mm Brass, Tin-plated
- * Mates with JWT A2508 series socket
- * JWT P/N : A2508WR0-NP-**

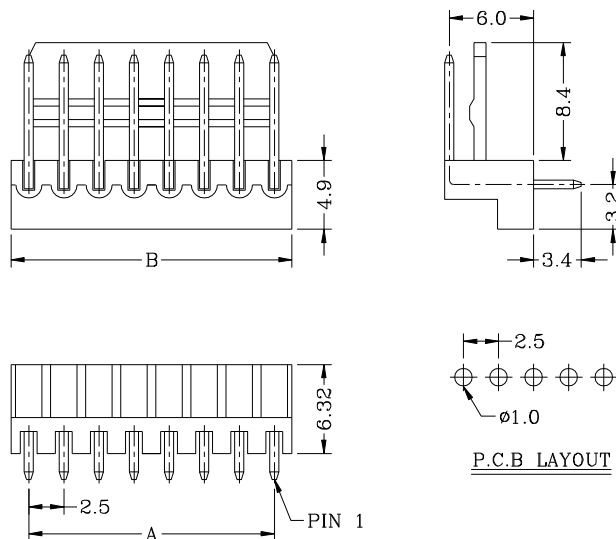

Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	2.5	5.0	1000
3	5.0	7.5	1000
4	7.5	10.0	1000
5	10.0	12.5	1000
6	12.5	15.0	1000
7	15.0	17.5	1000
8	17.5	20.0	1000
9	20.0	22.5	1000
10	22.5	25.0	1000
11	25.0	27.5	500
12	27.5	30.0	500
13	30.0	32.5	500
14	32.5	35.0	500
15	35.0	37.5	500
16	37.5	40.0	500
17	40.0	42.5	250
18	42.5	45.0	250
19	45.0	47.5	250
20	47.5	50.0	250