




A2512 Series 2.50mm pitch (V-SMT) wafer

Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
Contact Post: □0.64mm Brass, Matte Tin-plated
Solder Tab: 0.40mm^t Brass, Matte Tin Plated
- * Mates with JWT A2512 series socket
- * JWT P/N : A2512WV0-NPS-**

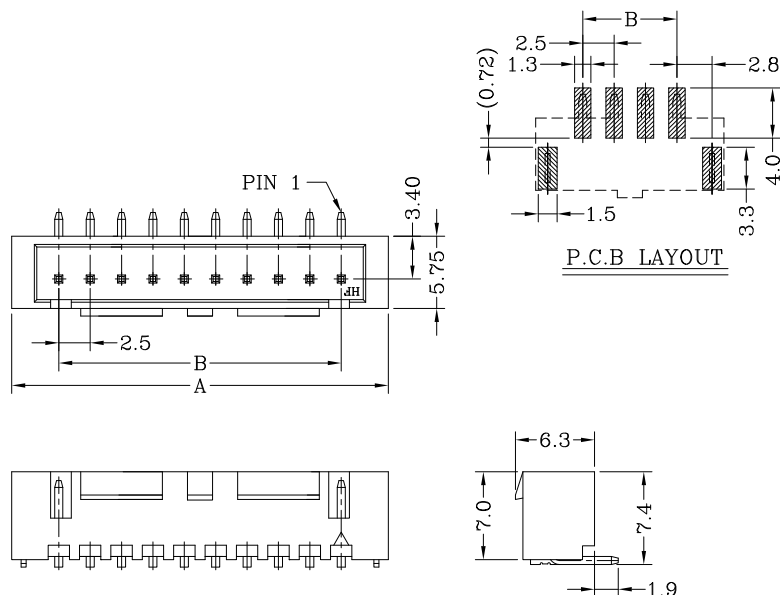


Dimensional Information:

Circuits	Dimension mm		Qty/Reel
	A	B	
2	10.00	—	450
3	12.50	5.00	450
4	15.00	7.50	450
5	17.50	10.00	450
6	20.00	12.50	450
7	22.50	15.00	450
8	25.00	17.50	450
9	27.50	20.00	450
10	30.00	22.50	450
11	32.50	25.00	450
12	35.00	27.50	450
13	37.50	30.00	450
14	40.00	32.50	450
15	42.50	35.00	450

A2512 Series 2.50mm pitch (R-SMT) wafer

Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Milky Yellow)
Contact Post: □0.64mm Brass, Matte Tin-plated
Solder Tab: 0.40mm^t Brass, Matte Tin Plated
- * Mates with JWT A2512 series socket
- * JWT P/N : A2512WR0-NPS-**

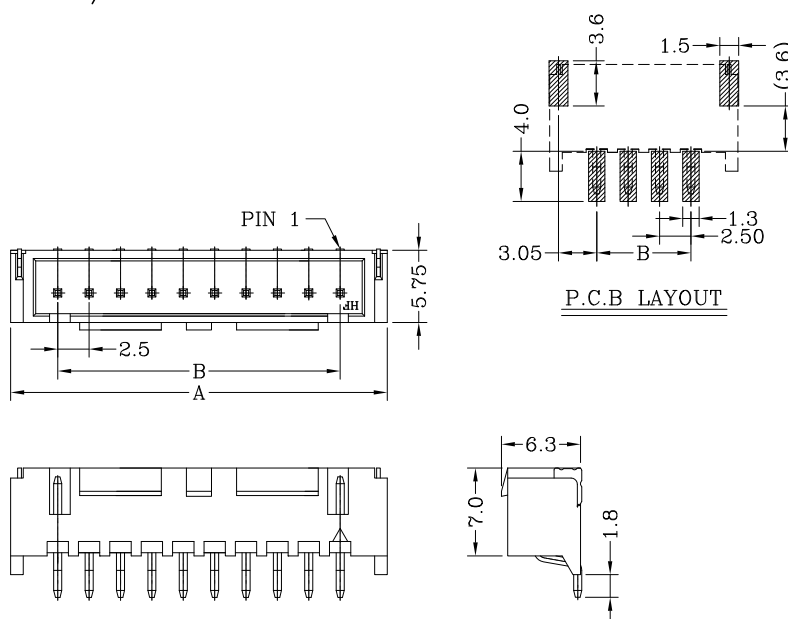

Dimensional Information:

Circuits	Dimension mm		Qty/Reel
	A	B	
2	10.00	—	600
3	12.50	5.00	600
4	15.00	7.50	600
5	17.50	10.00	600
6	20.00	12.50	600
7	22.50	15.00	600
8	25.00	17.50	600
9	27.50	20.00	600
10	30.00	22.50	600
11	32.50	25.00	600
12	35.00	27.50	600
13	37.50	30.00	600
14	40.00	32.50	600
15	42.50	35.00	600