


A2519 Series 2.50mm pitch wire to board connector



Specifications:

Poles	2~15 Poles
Pitch between poles	2.50mm
Rated Voltage	250V AC,DC
Rated Current	1.5A (AWG #28)
	2A (AWG #26)
	2.5A (AWG #24)
	3A (AWG #22)
Withstand Voltage	1000V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-40°~+85°C
Applicable Wire Range	AWG #22~#28

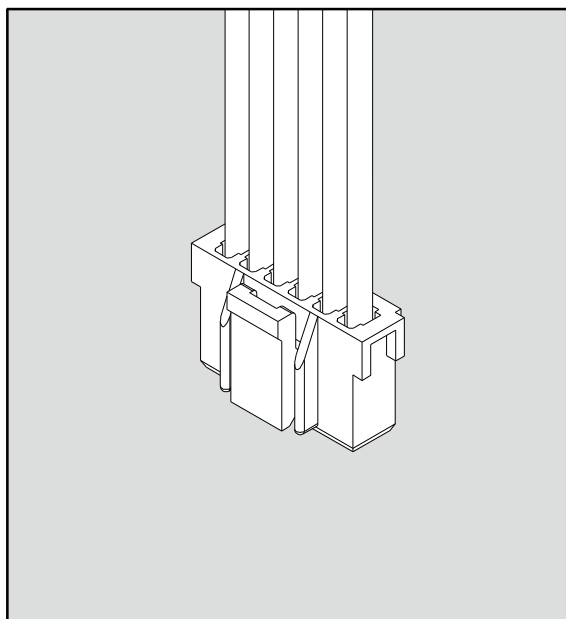


RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

A2519 Series 2.50mm pitch crimp terminal socket

Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT A2509 series terminal
- * JWT P/N : A2519H00-NP-66

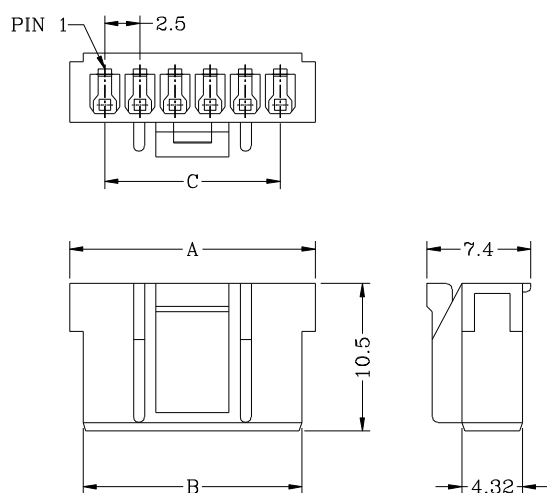

Dimensional & Ordering Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	7.5	5.6	2.5	1000
3	10.0	8.1	5.0	1000
4	12.5	10.6	7.5	1000
5	15.0	13.1	10.0	1000
6	17.5	15.6	12.5	1000
7	20.0	18.1	15.0	1000
8	22.5	20.6	17.5	1000
9	25.0	23.1	20.0	1000
10	27.5	25.6	22.5	1000
11	30.0	28.1	25.0	1000
12	32.5	30.6	27.5	1000
13	35.0	33.1	30.0	1000
14	37.5	35.6	32.5	1000
15	40.0	38.1	35.0	1000