
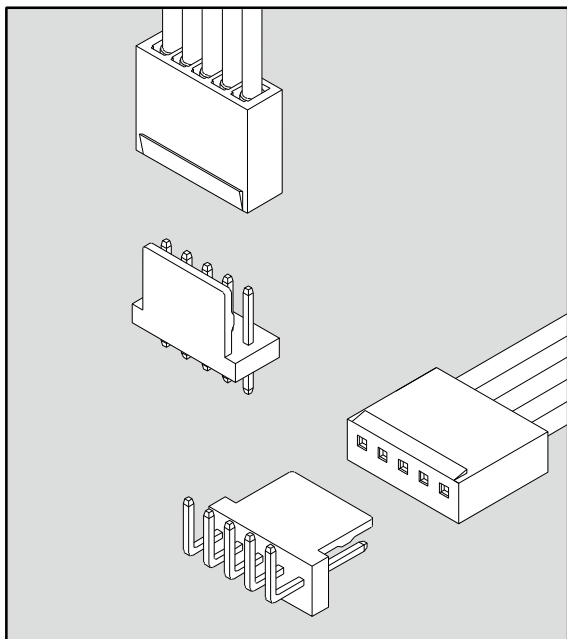


A2546 Series 2.54mm pitch wire to board connector



Specifications:

Poles	2~20 Poles
Pitch between poles	2.54mm
Rated Voltage	250V AC,DC
Rated Current	2.5A (AWG #22~#24)
Withstand Voltage	1500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+85°C
Applicable Wire Range	AWG #22~#28

UL Recognized No. E144544




RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

A2546 Series 2.54mm pitch crimp terminal socket

Features:

- * Material : Nylon 66 UL 94V-0 (Dark Brown)
- * Suitable for JWT A2543 series terminal
- * JWT P/N : A2546H00-NP

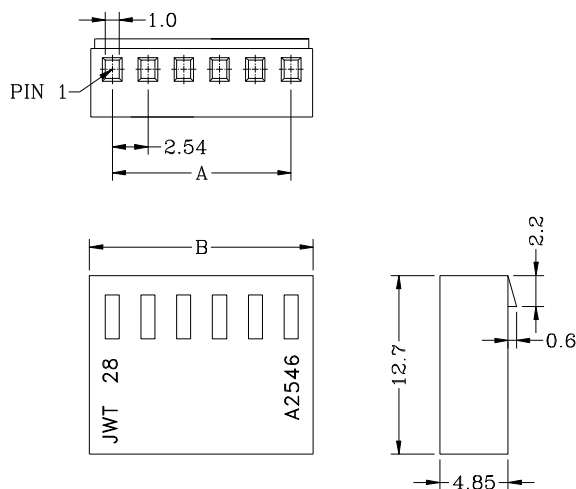

Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	2.54	5.60	1000
3	5.08	8.14	1000
4	7.62	10.68	1000
5	10.16	13.22	1000
6	12.70	15.76	1000
7	15.24	18.30	1000
8	17.78	20.84	1000
9	20.32	23.38	1000
10	22.86	25.92	1000
11	25.40	28.46	1000
12	27.94	31.00	1000
13	30.48	33.50	1000
14	33.02	36.08	1000
15	35.56	38.62	1000
16	38.10	41.16	1000
17	40.64	43.70	1000
18	43.18	46.24	1000
19	45.72	48.78	1000
20	48.26	51.32	1000