



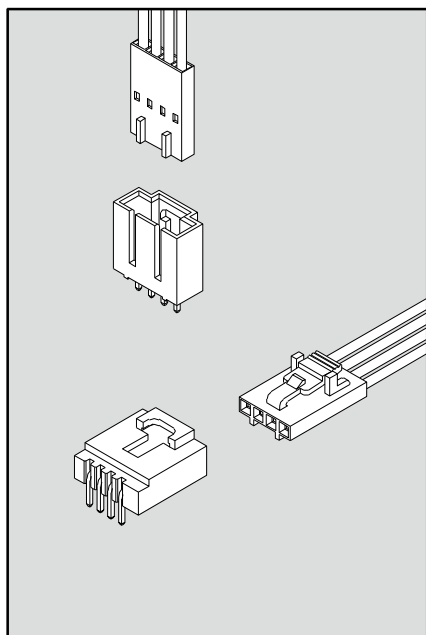


Assembly Layout

Straight Angle (V-Type)



Right Angle (R-Type)



Connector Product Number

A2547 ** # -NP -**-**					
①	②	③	④	⑤	⑥
① Series No : A2547	② Connection Type H0 : Terminal socket WV : Straight-angle wafer WR : Right-angle wafer		④ No. of contacts (NP) NP : Single row	⑥ Void circuit / Others (A~Z)# : Void pin	
③ Flame Class 2/0 : UL Rated 94V-0			⑤ Contact Post finish (Blank) : As specified 5e : Matte-tin over Nickel 0* : Gold over Nickel		
				⑥ HF : Halogen-free products	

Note: 0* (eg. 00, 0A, 0B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.

Specifications:

Poles	2~6 Poles
Pitch between poles	2.54mm
Rated Voltage	250V AC,DC
Rated Current	2.5A MAX.
Withstand Voltage	800V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+95°C
Applicable Wire Range	AWG #24~#28

UL Recognized No. E144544

CSA Certified No. LR78619

RoHS II-specification and
Halogen-free products.

Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.


A2547 Series 2.54mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (Black)
- * Suitable for JWT A2540 & A2547 series terminal
- * JWT P/N : A2547H02-NP


A

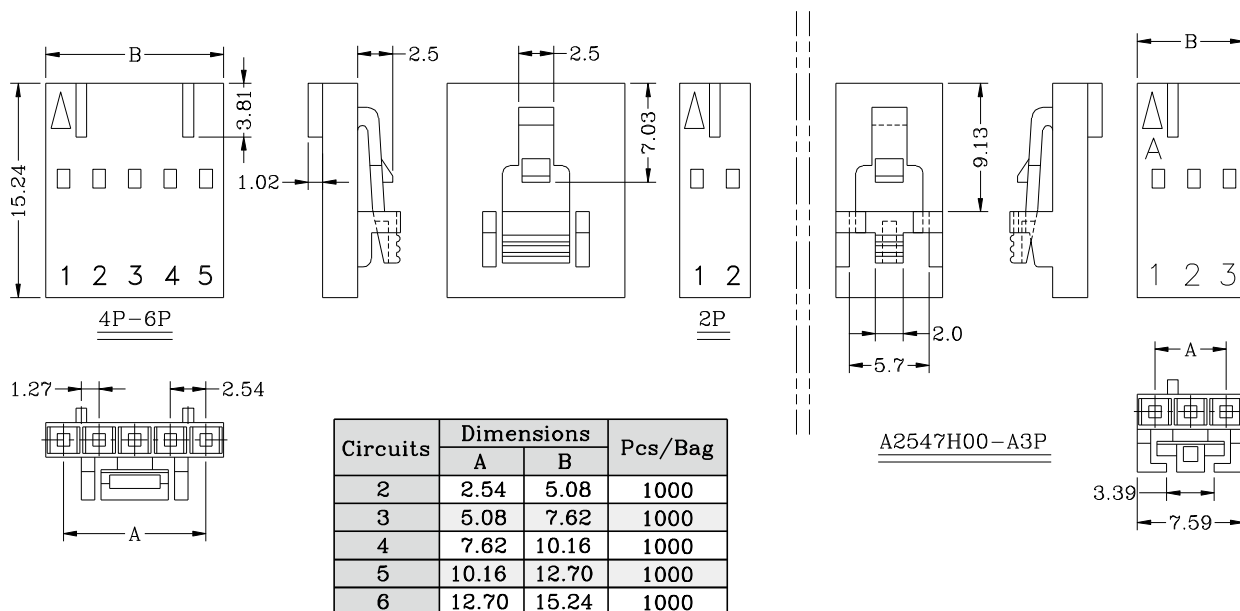

A2547 Series 2.54mm pitch crimp terminal

Features:

- * Used in JWT A2540 & A2547 series socket

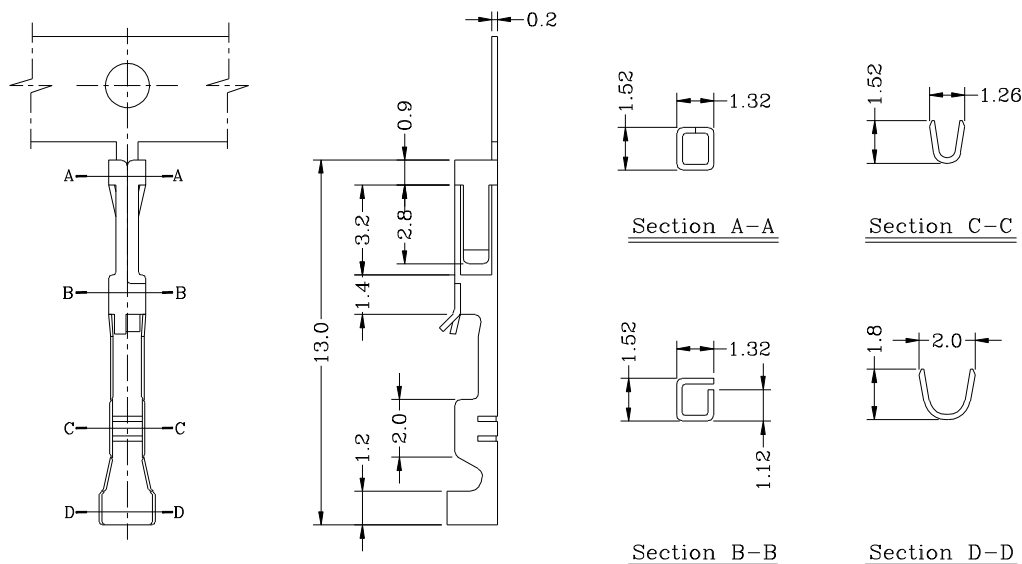

Specification & Ordering Information:


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A2547T0P-2	AWG #24~#28	1.70mm(max)	Phosphor bronze	Tin-plated	20,000 PCS
A2547T0P-0*	AWG #24~#28	1.70mm(max)	Phosphor bronze	Au over Nickel	20,000 PCS

Note: 0* (eg. 00, 0A, 0B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.

A2547 Series 2.54mm pitch (V-DIP) wafer

Features:

- * Material : Insulator: Refer to JWT P/N below, UL Rated 94V-0.
Contact Post: □0.64mm Brass, Tin-plated
- * Mates with JWT A2547 & A2540 series socket
- * JWT P/N (PBT) : A2547WV2-NP-** (Black)
- * JWT P/N (PA6T) : A2547WV2-NP-6T-** (Black)

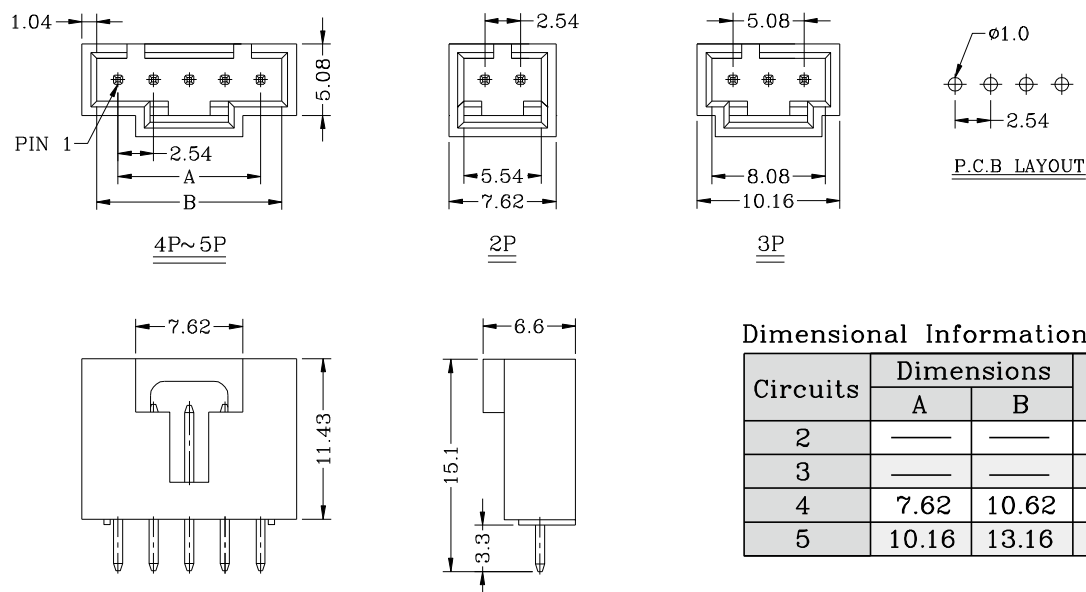

A2547 Series 2.54mm pitch (R-DIP) wafer

Features:

- * Material : Insulator: Refer to JWT P/N below, UL Rated 94V-0.
Contact Post: □0.64mm Brass, Tin-plated
- * Mates with JWT A2547 & A2540 series socket
- * JWT P/N (PBT) : A2547WR2-NP-** (Black)
- * JWT P/N (PA6T) : A2547WR2-NP-6T-** (Black)

