



A

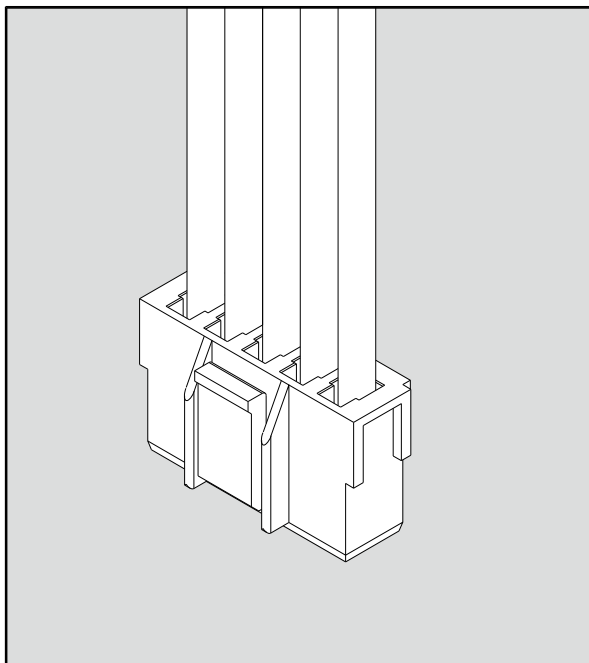

Assembly Layout

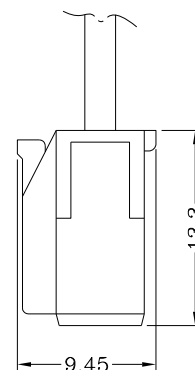

Specifications:

Poles	2~15 Poles
Pitch between poles	3.96mm
Rated Voltage	250V AC(rms)/DC
Rated Current	7A (AWG #18)
Withstand Voltage	1500V AC/minute
Contact Resistance	10mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-40°~ +85°C
Applicable Wire Range	AWG #18~#24



RoHS II-specification and
Halogen-free products.

Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.


A3964 Series 3.96mm pitch crimp terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 +15%GF (Natural)
- * Suitable for JWT A3964 series terminal
- * JWT P/N : A3964H00-NP-HF

A

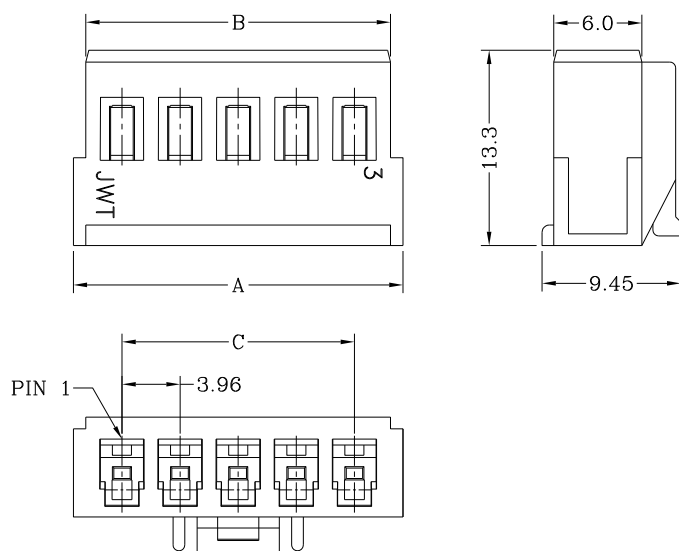


Dimensional & Ordering Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	10.58	8.88	—	1000
3	14.54	12.84	7.92	1000
4	18.50	16.80	11.88	1000
5	22.46	20.76	15.84	1000
6	26.42	24.72	19.80	1000
7	30.38	28.68	23.76	1000
8	34.34	32.64	27.72	1000
9	38.30	36.60	31.68	1000
10	42.26	40.56	35.64	1000
11	46.22	44.52	39.60	1000
12	50.18	48.48	43.56	1000
13	54.14	52.44	47.52	1000
14	58.10	56.40	51.48	1000
15	62.06	60.36	55.44	1000

A3964 Series 3.64mm pitch crimp terminal

Features:

- * Used in JWT A3964 series socket

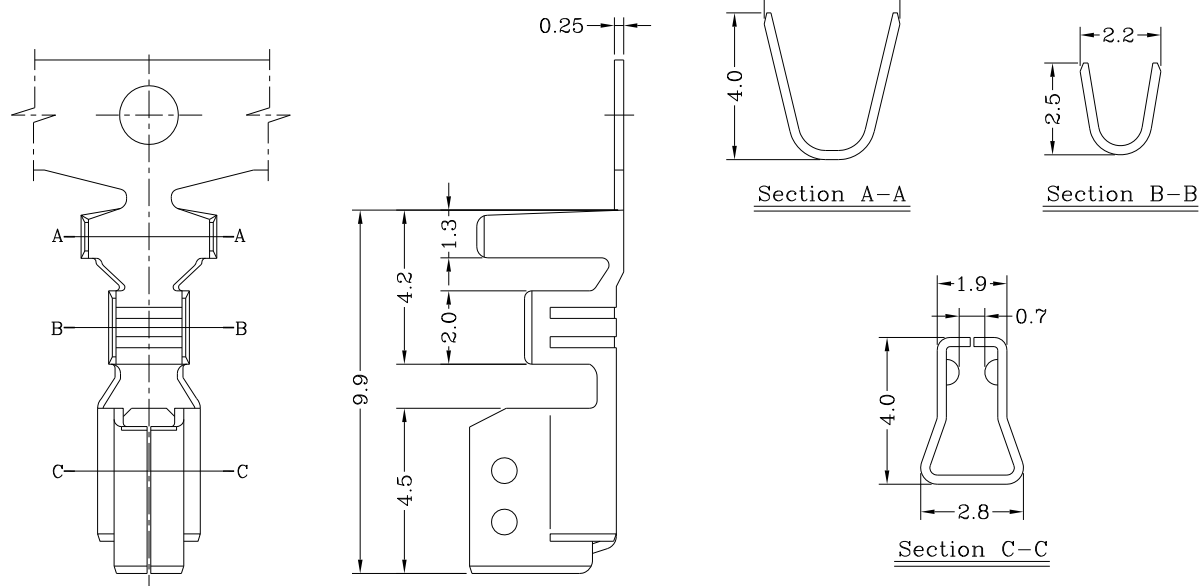

Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A3964T0B-2	AWG #18~#24	1.40mm~2.80mm	Brass	Tin-Plated	3,500 PCS
A3964T0P-2	AWG #18~#24	1.40mm~2.80mm	Phosphor bronze	Tin-Plated	3,500 PCS