



A

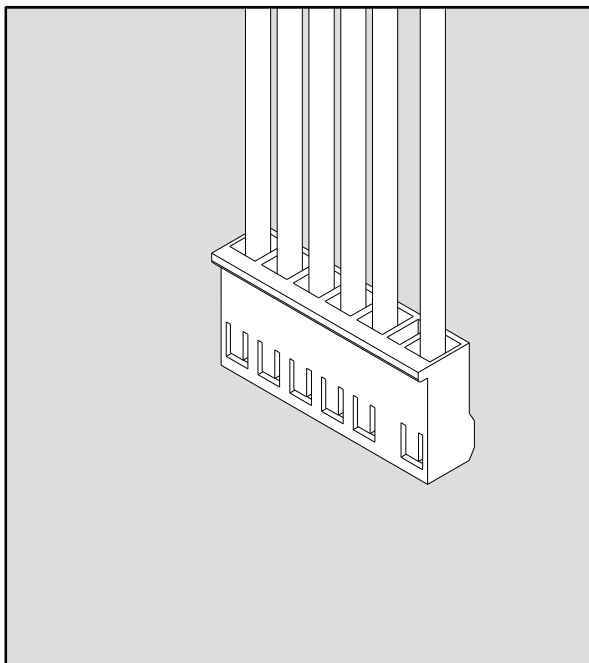

Assembly Layout

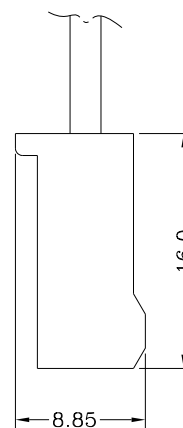

Specifications:

Poles	2~6 Poles
Pitch between poles	5.00mm
Rated Voltage	250V AC,DC
Rated Current	7A (AWG #18)
Withstand Voltage	1500V AC/minute
Contact Resistance	10mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-40°~+85°C
Applicable Wire Range	AWG #18~#22



RoHS II-specification and
Halogen-free products.



Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

A5001 Series 7.50-5.00mm pitch terminal socket



Features:

- * Material : Refer to JWT P/N below.
- * Suitable for JWT A5001 series terminal
- * JWT P/N (PA66-V2) : A5001H02-NP (Natural)
- * JWT P/N (PA66-V0) : A5001H00-NP (White)

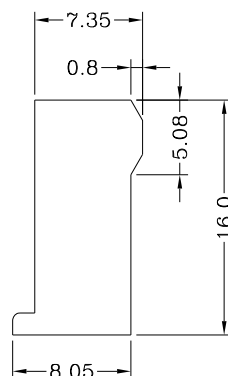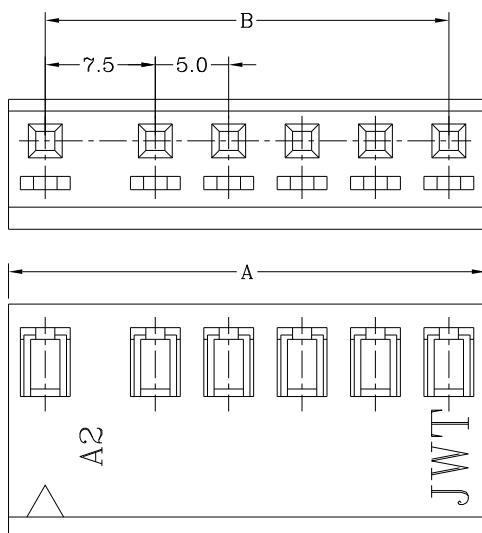



Dimensional & Ordering Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	12.5	7.5	1000
3	17.5	12.5	1000
4	22.5	17.5	1000
5	27.5	22.5	500
6	32.5	27.5	500


A5001 Series 7.50-5.00mm pitch crimp terminal

Features:


- * Used in JWT A5001 series socket

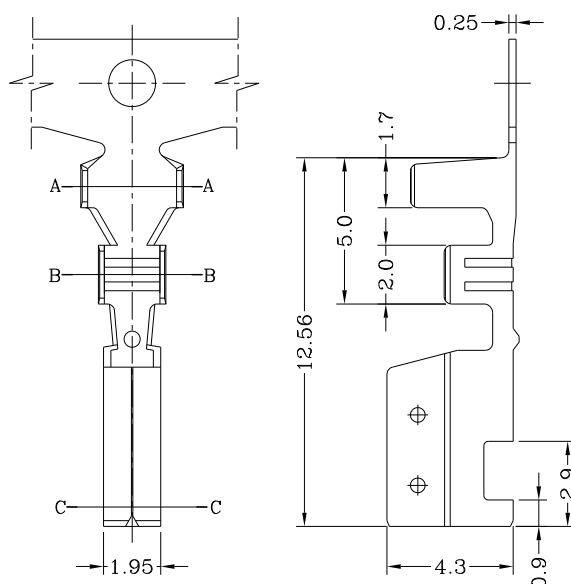

Section A-A



Section B-B



Section C-C

Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
A5001T0B-2	AWG #18~#22	1.60~2.80mm	Brass	Tin-plated	4,000 PCS
A5001T0P-2	AWG #18~#22	1.60~2.80mm	Phosphor bronze	Tin-plated	4,000 PCS