



B1272 Series 1.27mm pitch (V-SMT) wafer




Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Black)

Contact Post: 0.15mm^t Phosphor Bronze, Gold Flash Plated

- * Mates with JWT A1272 series socket

- * JWT P/N : B1272WV0-1AxNPS

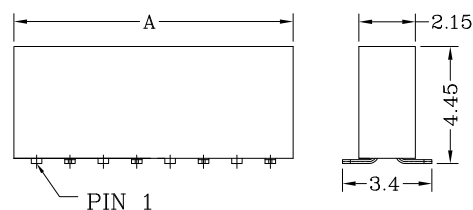

P.C.B LAYOUT

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		Circuits	Part No	Dimensions	
		A	B			A	B
2	B1272WV0-1Ax2PS	2.97	1.27	14	B1272WV0-1Ax14PS	18.21	16.51
3	B1272WV0-1Ax3PS	4.24	2.54	15	B1272WV0-1Ax15PS	19.48	17.78
4	B1272WV0-1Ax4PS	5.51	3.81	16	B1272WV0-1Ax16PS	20.75	19.05
5	B1272WV0-1Ax5PS	6.78	5.08	17	B1272WV0-1Ax17PS	22.02	20.32
6	B1272WV0-1Ax6PS	8.05	6.35	18	B1272WV0-1Ax18PS	23.29	21.59
7	B1272WV0-1Ax7PS	9.32	7.62	19	B1272WV0-1Ax19PS	24.56	22.86
8	B1272WV0-1Ax8PS	10.59	8.89	20	B1272WV0-1Ax20PS	25.83	24.13
9	B1272WV0-1Ax9PS	11.86	10.16	21	B1272WV0-1Ax21PS	27.10	25.40
10	B1272WV0-1Ax10PS	13.13	11.43	22	B1272WV0-1Ax22PS	28.37	26.67
11	B1272WV0-1Ax11PS	14.40	12.70	23	B1272WV0-1Ax23PS	29.64	27.94
12	B1272WV0-1Ax12PS	15.67	13.97	24	B1272WV0-1Ax24PS	30.91	29.21
13	B1272WV0-1Ax13PS	16.94	15.24	25	B1272WV0-1Ax25PS	32.18	30.48



RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

B1272 Series 1.27mm pitch (V-SMT) wafer




Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Black)

Contact Post: 0.15mm^t Phosphor Bronze, Gold Flash Plated

- * Mates with JWT A1272 series socket

- * JWT P/N : B1272WV0-1BxNPS

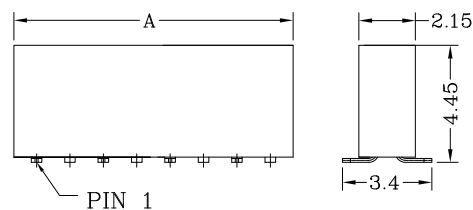

P.C.B LAYOUT

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		Circuits	Part No	Dimensions	
		A	B			A	B
2	B1272WV0-1Bx2PS	2.97	1.27	14	B1272WV0-1Bx14PS	18.21	16.51
3	B1272WV0-1Bx3PS	4.24	2.54	15	B1272WV0-1Bx15PS	19.48	17.78
4	B1272WV0-1Bx4PS	5.51	3.81	16	B1272WV0-1Bx16PS	20.75	19.05
5	B1272WV0-1Bx5PS	6.78	5.08	17	B1272WV0-1Bx17PS	22.02	20.32
6	B1272WV0-1Bx6PS	8.05	6.35	18	B1272WV0-1Bx18PS	23.29	21.59
7	B1272WV0-1Bx7PS	9.32	7.62	19	B1272WV0-1Bx19PS	24.56	22.86
8	B1272WV0-1Bx8PS	10.59	8.89	20	B1272WV0-1Bx20PS	25.83	24.13
9	B1272WV0-1Bx9PS	11.86	10.16	21	B1272WV0-1Bx21PS	27.10	25.40
10	B1272WV0-1Bx10PS	13.13	11.43	22	B1272WV0-1Bx22PS	28.37	26.67
11	B1272WV0-1Bx11PS	14.40	12.70	23	B1272WV0-1Bx23PS	29.64	27.94
12	B1272WV0-1Bx12PS	15.67	13.97	24	B1272WV0-1Bx24PS	30.91	29.21
13	B1272WV0-1Bx13PS	16.94	15.24	25	B1272WV0-1Bx25PS	32.18	30.48



RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

B1272 Series 1.27mm pitch (V-SMT) wafer



Features:


- * Material : Insulator: Nylon 6T UL 94V-0 (Black)

Contact Post: 0.15mm^t Phosphor Bronze, Gold Flash Plated

- * Mates with JWT A1272 series socket
- * JWT P/N : B1272WV0-2AxNPS-BS

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		
		A	B	C
2x2	B1272WV0-2Ax2PS-BS	3.00	1.27	—
2x3	B1272WV0-2Ax3PS-BS	4.27	2.54	1.27
2x4	B1272WV0-2Ax4PS-BS	5.54	3.81	2.54
2x5	B1272WV0-2Ax5PS-BS	6.81	5.08	3.81
2x6	B1272WV0-2Ax6PS-BS	8.08	6.35	5.08
2x7	B1272WV0-2Ax7PS-BS	9.35	7.62	6.35
2x8	B1272WV0-2Ax8PS-BS	10.52	8.89	7.62
2x9	B1272WV0-2Ax9PS-BS	11.89	10.16	8.89
2x10	B1272WV0-2Ax10PS-BS	13.16	11.43	10.16
2x11	B1272WV0-2Ax11PS-BS	14.43	12.70	11.43
2x12	B1272WV0-2Ax12PS-BS	15.70	13.97	12.70
2x13	B1272WV0-2Ax13PS-BS	16.97	15.24	13.97
2x14	B1272WV0-2Ax14PS-BS	18.24	16.51	15.24
2x15	B1272WV0-2Ax15PS-BS	19.51	17.78	16.51
2x16	B1272WV0-2Ax16PS-BS	20.78	19.05	17.78
2x17	B1272WV0-2Ax17PS-BS	22.05	20.32	19.05
2x18	B1272WV0-2Ax18PS-BS	23.32	21.59	20.32
2x19	B1272WV0-2Ax19PS-BS	24.59	22.86	21.59
2x20	B1272WV0-2Ax20PS-BS	25.86	24.13	22.86
2x21	B1272WV0-2Ax21PS-BS	27.13	25.40	24.13
2x22	B1272WV0-2Ax22PS-BS	28.40	26.67	25.40
2x23	B1272WV0-2Ax23PS-BS	29.67	27.94	26.67
2x24	B1272WV0-2Ax24PS-BS	30.94	29.21	27.94
2x25	B1272WV0-2Ax25PS-BS	32.21	30.48	29.21

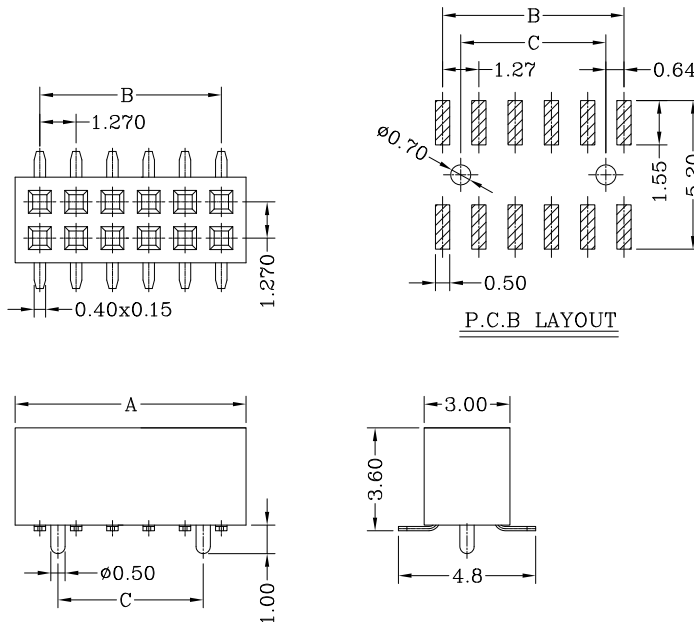

RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

B1272 Series 1.27mm pitch (V-SMT) wafer

Features:


- * Material : Insulator: Nylon 6T UL 94V-0 (Black)

Contact Post: 0.15mm^t Phosphor Bronze, Gold Flash Plated

- * Mates with JWT A1272 series socket
- * JWT P/N : B1272WV0-2AxNPS-BS2

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		
		A	B	C
2x2	B1272WV0-2Ax2PS-BS2	3.00	1.27	4.32
2x3	B1272WV0-2Ax3PS-BS2	4.27	2.54	5.59
2x4	B1272WV0-2Ax4PS-BS2	5.54	3.81	6.86
2x5	B1272WV0-2Ax5PS-BS2	6.81	5.08	8.13
2x6	B1272WV0-2Ax6PS-BS2	8.08	6.35	9.40
2x7	B1272WV0-2Ax7PS-BS2	9.35	7.62	10.67
2x8	B1272WV0-2Ax8PS-BS2	10.52	8.89	11.94
2x9	B1272WV0-2Ax9PS-BS2	11.89	10.16	13.21
2x10	B1272WV0-2Ax10PS-BS2	13.16	11.43	14.48
2x11	B1272WV0-2Ax11PS-BS2	14.43	12.70	15.75
2x12	B1272WV0-2Ax12PS-BS2	15.70	13.97	17.02
2x13	B1272WV0-2Ax13PS-BS2	16.97	15.24	18.29
2x14	B1272WV0-2Ax14PS-BS2	18.24	16.51	19.56
2x15	B1272WV0-2Ax15PS-BS2	19.51	17.78	20.83
2x16	B1272WV0-2Ax16PS-BS2	20.78	19.05	22.10
2x17	B1272WV0-2Ax17PS-BS2	22.05	20.32	23.37
2x18	B1272WV0-2Ax18PS-BS2	23.32	21.59	24.64
2x19	B1272WV0-2Ax19PS-BS2	24.59	22.86	25.91
2x20	B1272WV0-2Ax20PS-BS2	25.86	24.13	27.18
2x21	B1272WV0-2Ax21PS-BS2	27.13	25.40	28.45
2x22	B1272WV0-2Ax22PS-BS2	28.40	26.67	29.72
2x23	B1272WV0-2Ax23PS-BS2	29.67	27.94	30.99
2x24	B1272WV0-2Ax24PS-BS2	30.94	29.21	32.26
2x25	B1272WV0-2Ax25PS-BS2	32.21	30.48	33.53

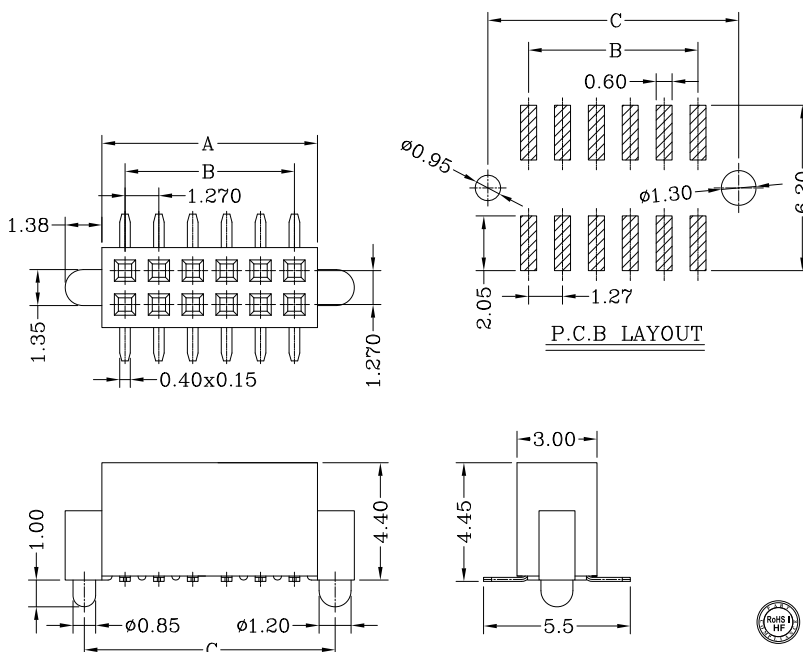

RoHS II-specification and Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

B1272 Series 1.27mm pitch (R-DIP) wafer



Features:

- * Material : Insulator: Nylon 6T UL 94V-0 (Black)
Contact Post: 0.15mm^t Phosphor Bronze, Gold Flash Plated
- * Mates with JWT A1272 series socket
- * JWT P/N : B1272WR0-2AxNPA-6T

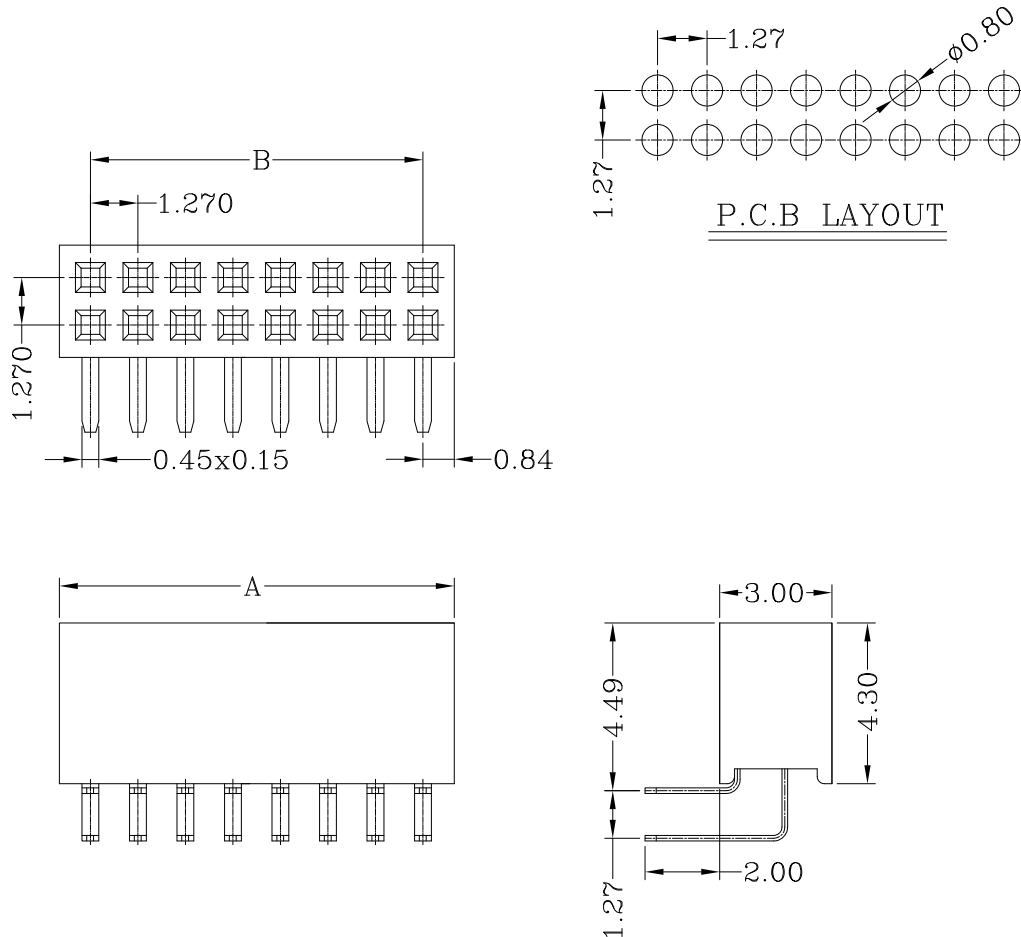

Dimensional & Ordering Information:

Circuits	Part No	Dimensions		Circuits	Part No	Dimensions	
		A	B			A	B
2x2	B1272WR0-2Ax2PA-6T	2.94	1.27	2x14	B1272WR0-2Ax14PA-6T	18.18	16.51
2x3	B1272WR0-2Ax3PA-6T	4.21	2.54	2x15	B1272WR0-2Ax15PA-6T	19.45	17.78
2x4	B1272WR0-2Ax4PA-6T	5.48	3.81	2x16	B1272WR0-2Ax16PA-6T	20.72	19.05
2x5	B1272WR0-2Ax5PA-6T	6.75	5.08	2x17	B1272WR0-2Ax17PA-6T	21.99	20.32
2x6	B1272WR0-2Ax6PA-6T	8.02	6.35	2x18	B1272WR0-2Ax18PA-6T	23.26	21.59
2x7	B1272WR0-2Ax7PA-6T	9.29	7.62	2x19	B1272WR0-2Ax19PA-6T	24.53	22.86
2x8	B1272WR0-2Ax8PA-6T	10.56	8.89	2x20	B1272WR0-2Ax20PA-6T	25.80	24.13
2x9	B1272WR0-2Ax9PA-6T	11.83	10.16	2x21	B1272WR0-2Ax21PA-6T	27.07	25.40
2x10	B1272WR0-2Ax10PA-6T	13.10	11.43	2x22	B1272WR0-2Ax22PA-6T	28.34	26.67
2x11	B1272WR0-2Ax11PA-6T	14.37	12.70	2x23	B1272WR0-2Ax23PA-6T	29.61	27.94
2x12	B1272WR0-2Ax12PA-6T	15.64	13.97	2x24	B1272WR0-2Ax24PA-6T	30.88	29.21
2x13	B1272WR0-2Ax13PA-6T	16.91	15.24	2x25	B1272WR0-2Ax25PA-6T	32.15	30.48



RoHS II-specification and Halogen-free products.

Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.