



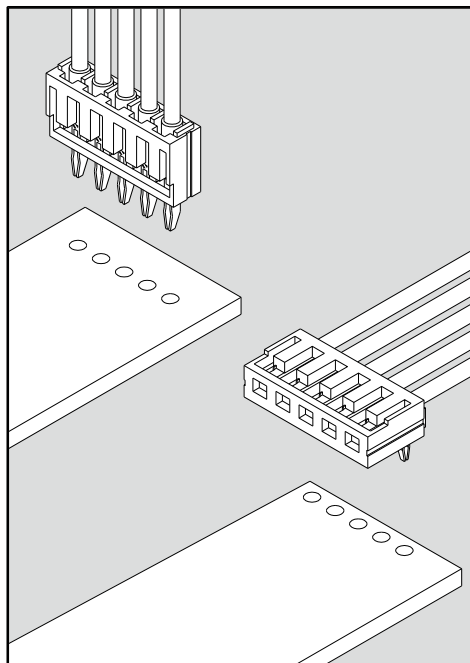


Assembly Layout

Straight Angle (V-Type)

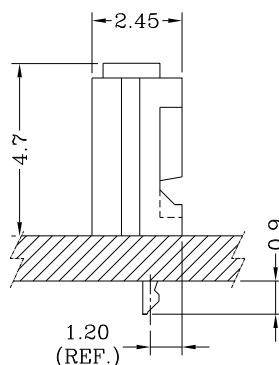

Right Angle (R-Type)



Connector Product Number

B1501 ① ** ② # ③ -NP ④ *- ** ⑤ ⑥						
①	Series No : B1501	④	No. of contacts (NP) NP : Single row	⑥	Insulating material 6T : Nylon 6T UL 94V-0	
②	Connection Type H0 : Straight-angle socket HR : Right-angle socket		⑤		Product color (Blank) : As specified (A~Z) : Other colors	⑥ HF : Halogen-free products
③	Flame Class 0 : Nylon 66 UL 94V-0 Nylon 6T UL 94V-0					

Specifications:

Poles	2~15 Poles
Pitch between poles	1.50mm
Rated Voltage	50V AC,DC
Rated Current	1A (AWG #26)
Withstand Voltage	500V AC/minute
Insulation Resistance	500M Ω (MIN.)
Temperature Range	-25 $^{\circ}$ ~+85 $^{\circ}$ C
Applicable Wire Range	AWG #26~#30



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

B1501 Series 1.50mm pitch board-in terminal socket



Features:

- * Straight Vertical Entry Type Terminal Socket
- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT B1501T0*-** series terminal
- * JWT P/N : B1501H00-NP-66

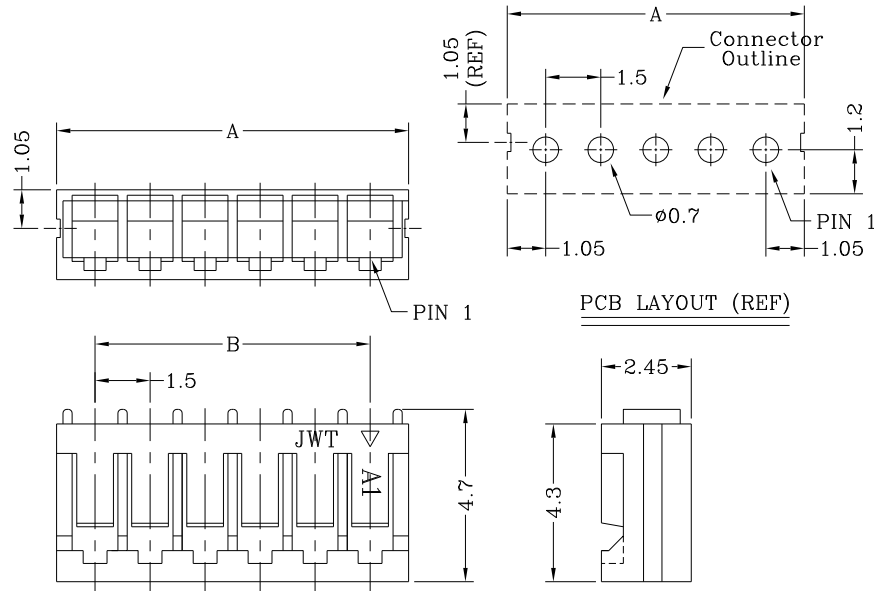


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	3.6	1.5	1000
3	5.1	3.0	1000
4	6.6	4.5	1000
5	8.1	6.0	1000
6	9.6	7.5	1000
7	11.1	9.0	1000
8	12.6	10.5	1000
9	14.1	12.0	1000
10	15.6	13.5	1000
11	17.1	15.0	1000
12	18.6	16.5	1000
13	20.1	18.0	1000
14	21.6	19.5	1000
15	23.1	21.0	1000

B1501 Series 1.50mm pitch board-in terminal socket

Features:

- * Right-angle Horizontal Entry Type Terminal Socket
- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT B1501TR*-** series terminal
- * JWT P/N : B1501HR0-NP-66

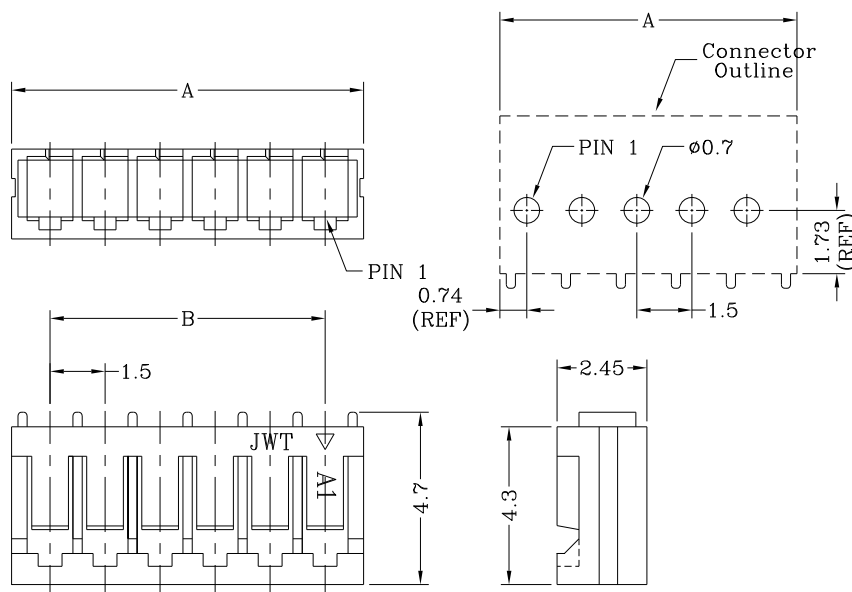


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	3.6	1.5	1000
3	5.1	3.0	1000
4	6.6	4.5	1000
5	8.1	6.0	1000
6	9.6	7.5	1000
7	11.1	9.0	1000
8	12.6	10.5	1000
9	14.1	12.0	1000
10	15.6	13.5	1000
11	17.1	15.0	1000
12	18.6	16.5	1000
13	20.1	18.0	1000
14	21.6	19.5	1000
15	23.1	21.0	1000



B1501 Series 1.50mm pitch crimp terminal (V-Type)

- * Applicable PCB Thickness: 0.80~1.60mm
- * Used in JWT B1501H00-NP-66 socket

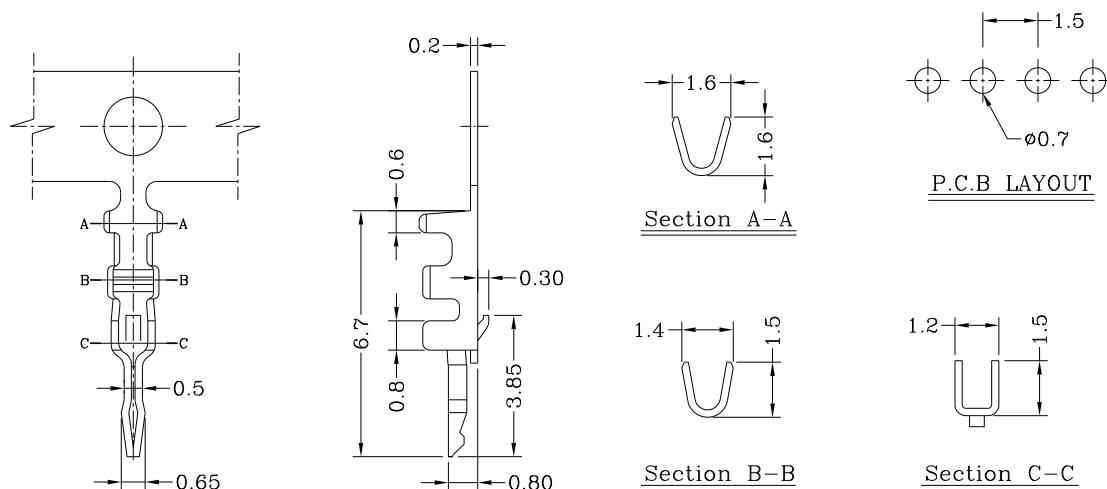


Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1501T0B-2e	AWG #26~#30	1.00mm(max)	Brass	Post-Tin plated	10,000 PCS
B1501T0B-5e	AWG #26~#30	1.00mm(max)	Brass	Matte-Tin plated	10,000 PCS

B1501 Series 1.50mm pitch crimp terminal (R-Type)

- * Applicable PCB Thickness: 0.80~1.60mm
- * Used in JWT B1501HR0-NP-66 socket

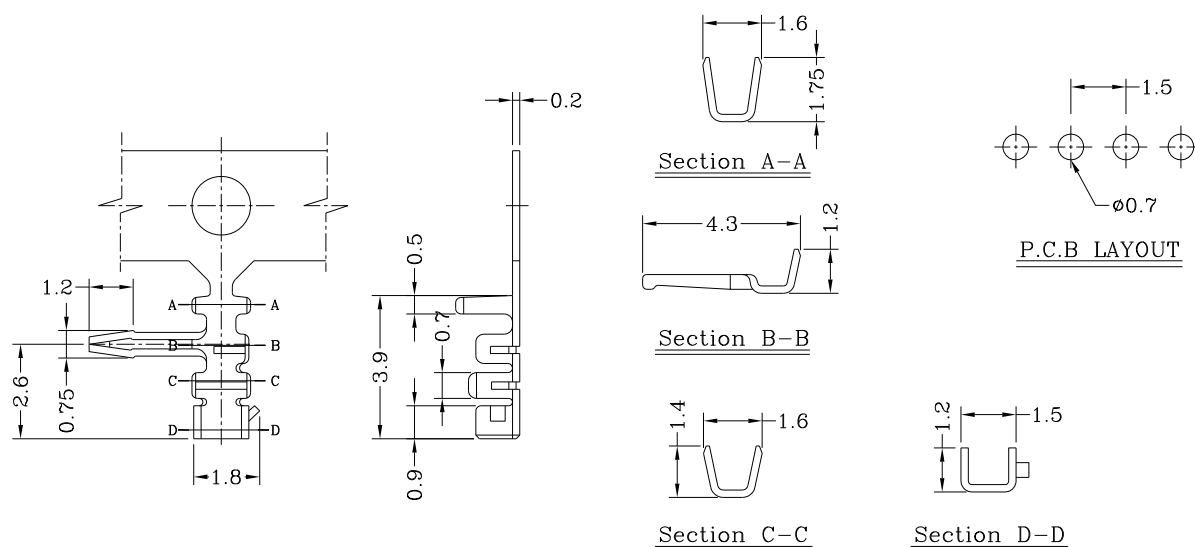

Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
B1501TRB-2e	AWG #26~#30	1.00mm(max)	Brass	Post-Tin plated	10,000 PCS
B1501TRB-5e	AWG #26~#30	1.00mm(max)	Brass	Matte-Tin plated	10,000 PCS