



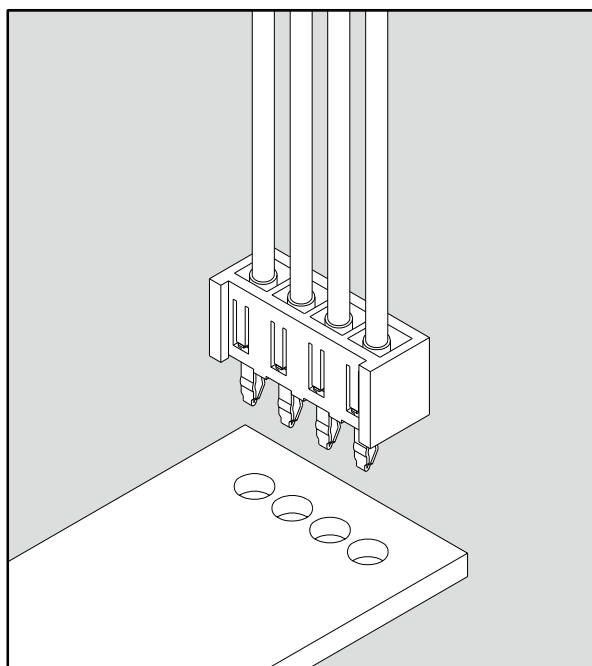

Assembly Layout

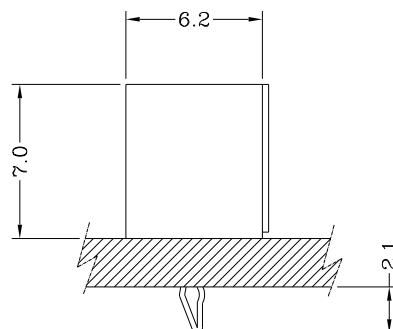

B

Connector Product Number

B3962 ** # -NP * - **					
①	②	③	④	⑤	⑥
① Series No : B3962	② Connection Type H0 : Terminal socket		④ No. of contacts (NP) NP : Single row	⑥ Insulating material 6T : Nylon 6T UL 94V-0	
③ Flame Class 0 : UL Rated 94V-0			⑤ Product color (Blank) : As specified (A~Z) : Other colors		

Specifications:

Poles	2~12 Poles
Pitch between poles	3.96mm
Rated Voltage	250V AC,DC
Rated Current	7A (AWG #18)
Withstand Voltage	1500V AC/minute
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-25°~+85°C
Applicable Wire Range	AWG #18~#22



RoHS II-specification and
Halogen-free products.



Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

B3962 Series 3.96mm pitch board-in terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT B3962 series terminal
- * JWT P/N : B3962H00-NP

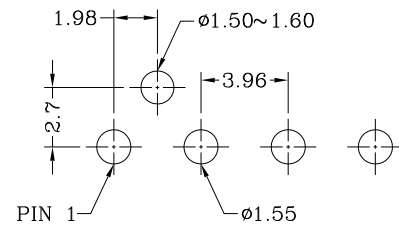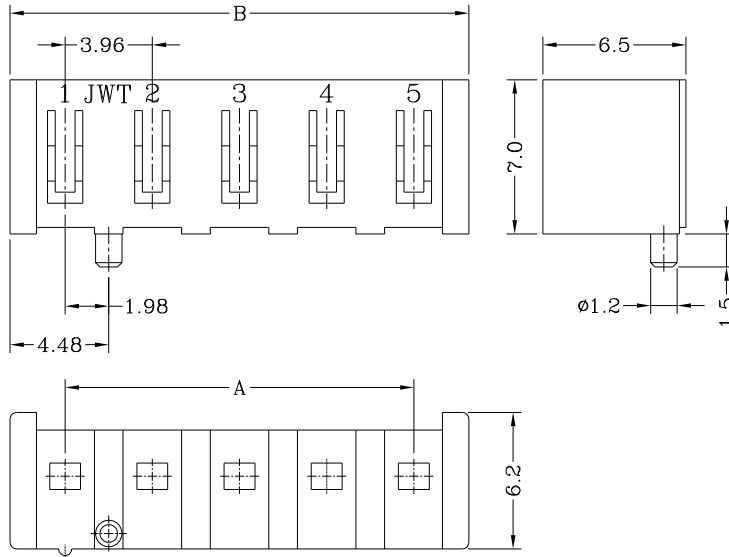


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	3.96	8.96	1000
3	7.92	12.92	1000
4	11.88	16.88	1000
5	15.84	20.84	1000
6	19.80	24.80	1000
7	23.76	28.76	1000
8	27.72	32.72	1000
9	31.68	36.68	1000
10	35.64	40.64	1000
11	39.60	44.60	1000
12	43.56	48.56	1000

B3962 Series 3.96mm pitch crimp terminal

- * Applicable PCB Thickness: 1.60mm
- * Used in JWT B3962H00-NP socket

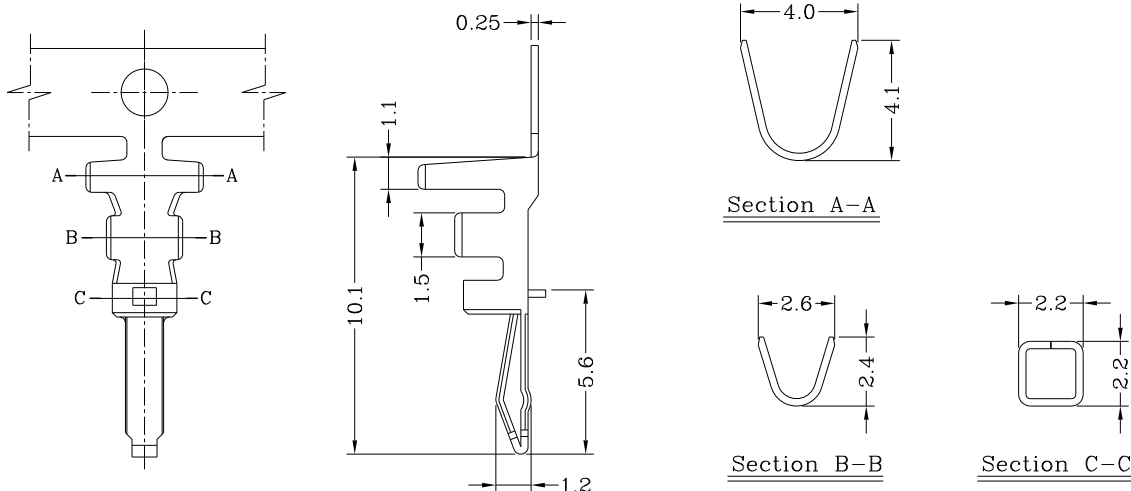

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel	Note
B3962T0*-2e	AWG #18~#22	3.00mm(max)	Brass/ P. Bronze	Tin-plated	4,500 PCS	e:Stamping before tin plating
B3962T0*-5e	AWG #18~#22	3.00mm(max)	Brass/ P. Bronze	Matte Tin-plated	4,500 PCS	