



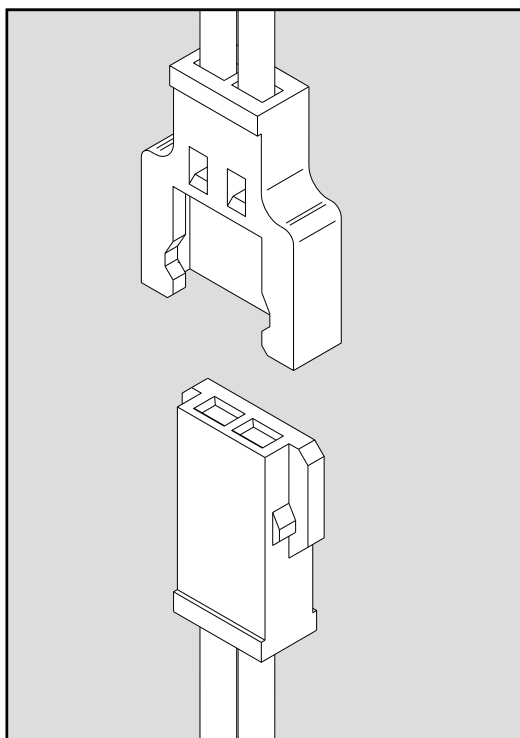

Assembly Layout

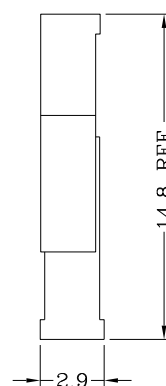

Specifications:

Poles	2~10 Poles
Pitch between poles	2.00mm
Rated Voltage	125V AC,DC
Rated Current	1A (AWG #28)
	1.5A (AWG #26)
	2A (AWG #24)
Withstand Voltage	500V AC/minute
Contact Resistance	20m Ω (MAX.)
Insulation Resistance	1,000M Ω (MIN.)
Temperature Range	-40°~+105°C
Applicable Wire Range	AWG #24~#28


 UL Recognized No. E144544



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

C2001 Series 2.00mm pitch crimp terminal



Features:

* Used in JWT C2001 series socket

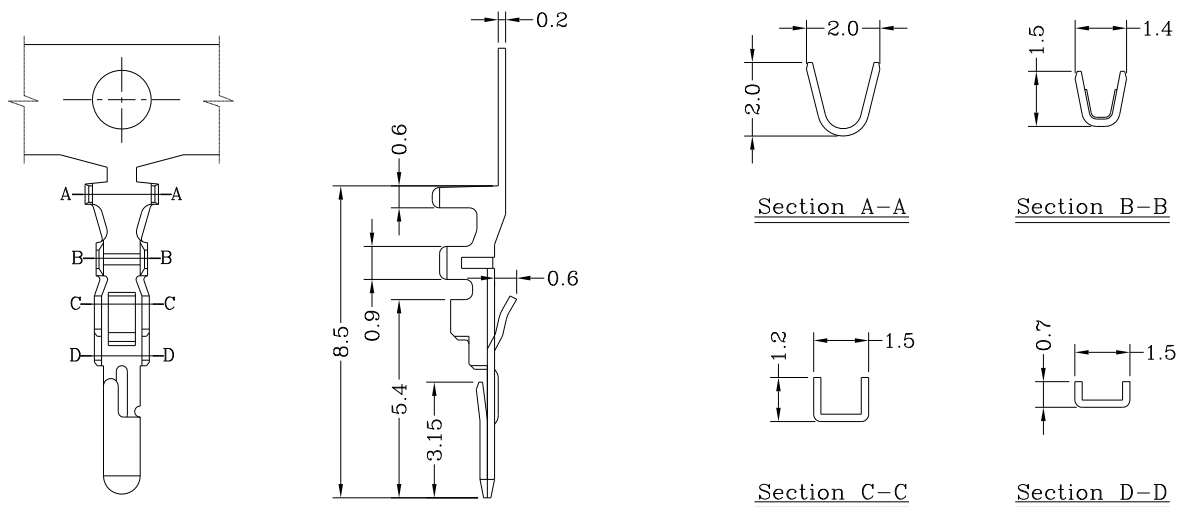


Specification & Ordering Information:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2001TOP-2	AWG #24~#28	1.15mm(max)	Phosphor bronze	Tin-plated	15,000 pcs

C2002 Series 2.00mm pitch crimp terminal

Features:

* Used in JWT C2002 series socket

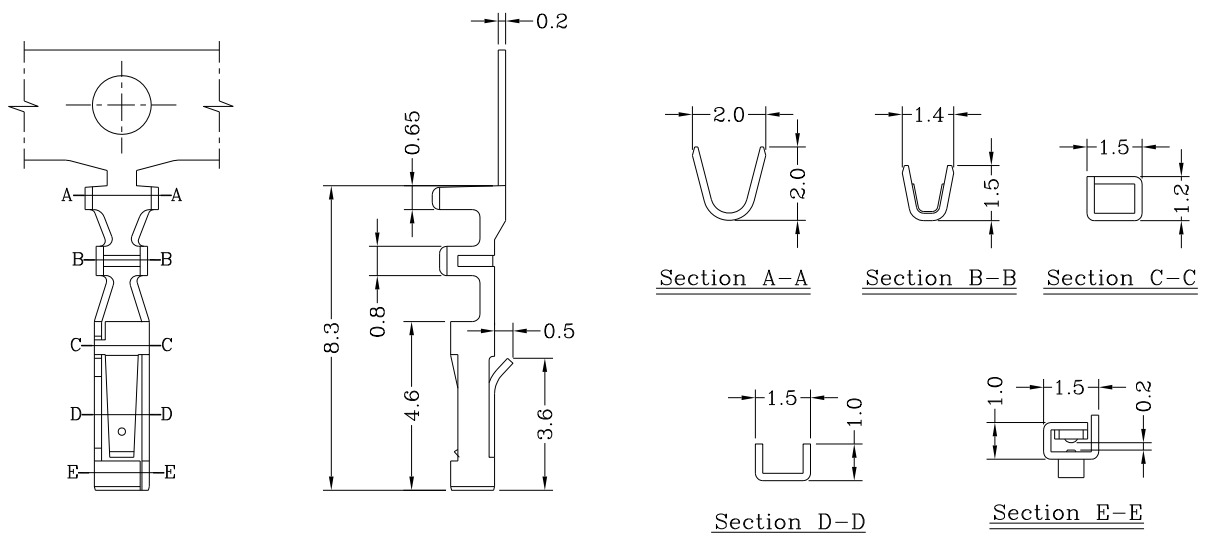

Specification & Ordering Information:


Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2002TOP-2	AWG #24~#28	1.15mm(max)	Phosphor bronze	Tin-plated	15,000 pcs

C2001 Series 2.00mm pitch terminal plug socket



Features:

- * Material : PBT +15%GF / Nylon 66 UL 94V-0 (White)
- * Used in JWT C2001 series Terminal
- * JWT P/N : C2001H00-NP-**

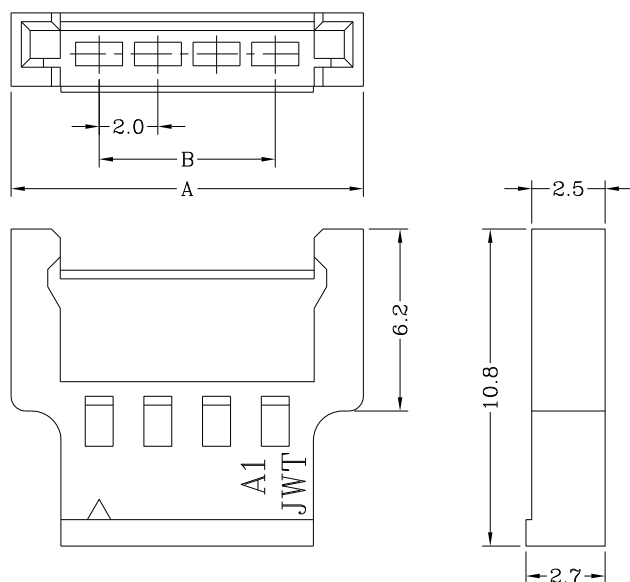


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	8.0	2.0	1000
3	10.0	4.0	1000
4	12.0	6.0	1000
5	14.0	8.0	1000
6	16.0	10.0	1000
7	18.0	12.0	1000
8	20.0	14.0	1000
9	22.0	16.0	1000
10	24.0	18.0	1000

C2002 Series 2.00mm pitch terminal receptacle socket

Features:

- * Material : PBT +15%GF / Nylon 66 UL 94V-0 (White)
- * Used in JWT C2002 series Terminal
- * JWT P/N : C2002H00-NP-**

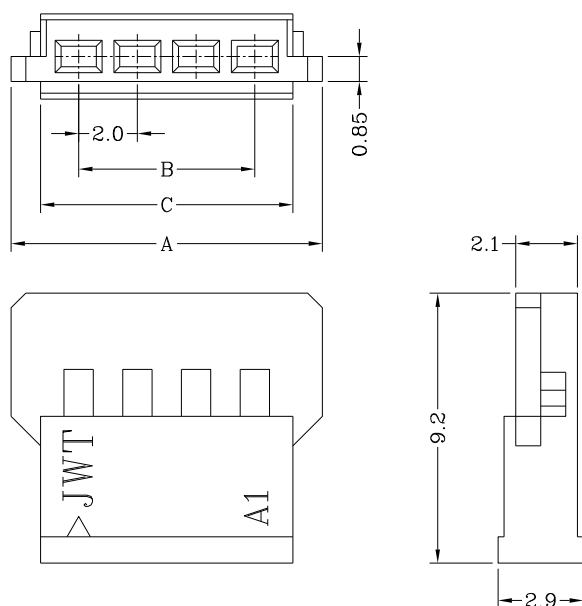

Dimensional Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	6.6	2.0	4.6	1000
3	8.6	4.0	6.6	1000
4	10.6	6.0	8.6	1000
5	12.6	8.0	10.6	1000
6	14.6	10.0	12.6	1000
7	16.6	12.0	14.6	1000
8	18.6	14.0	16.6	1000
9	20.6	16.0	18.6	1000
10	22.6	18.0	20.6	1000