



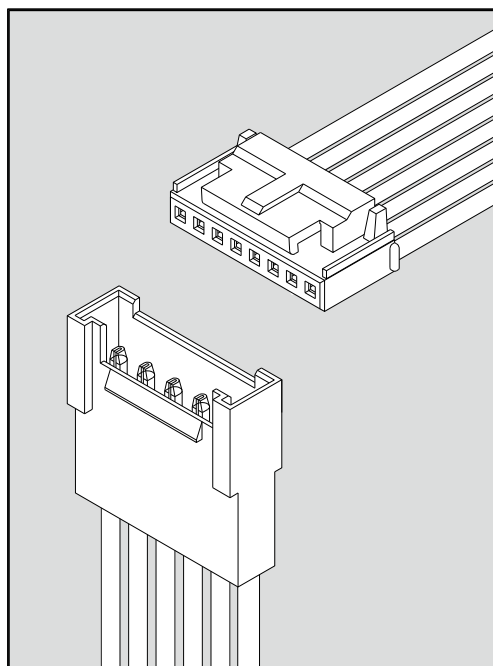

Assembly Layout

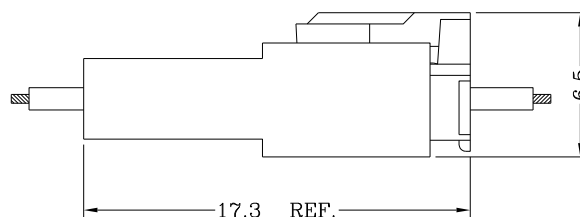

Specifications:

Poles	2~12 Poles
Pitch between poles	2.00mm
Rated Voltage	125V AC,DC
Rated Current	2A (AWG #24)
Withstand Voltage	1000V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1,000MΩ (MIN.)
Temperature Range	-40°~+95°C
Applicable Wire Range	AWG #22~#28



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

C2008 Series 2.00mm pitch crimp terminal



Features:

- * Used in JWT C2008 series socket

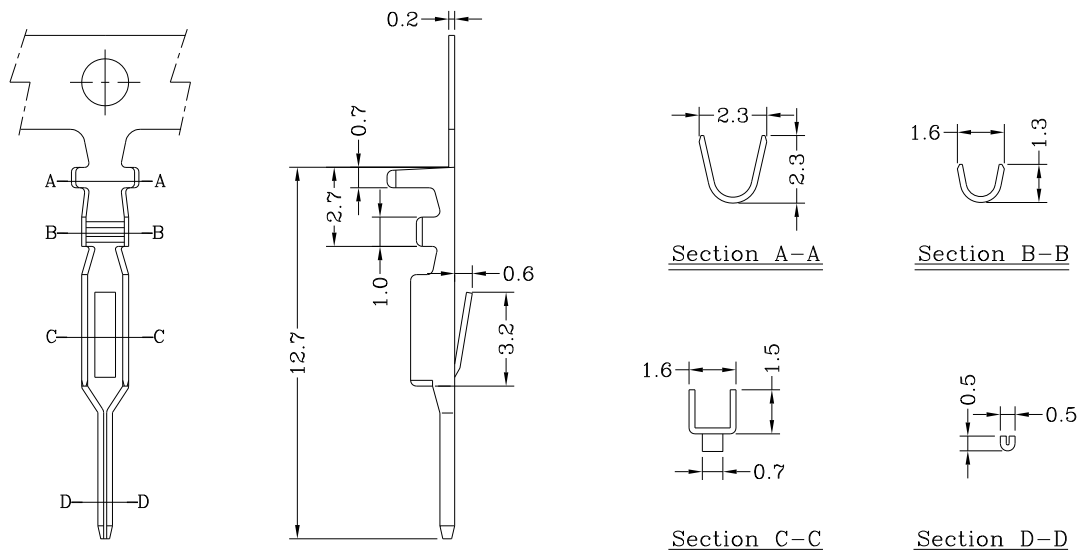


Specification & Ordering Information:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2008T0B-2	AWG #22~#28	1.60mm (max)	Brass	Tin-plated	9,000 PCS

C2008 Series 2.00mm pitch terminal plug socket

Features:

- * Material : PBT / Nylon 66 UL 94V-0 (White)
- * Used in JWT C2008 series Terminal
- * Mates with JWT A2008 receptacle socket
- * JWT P/N : C2008H00-NP-66

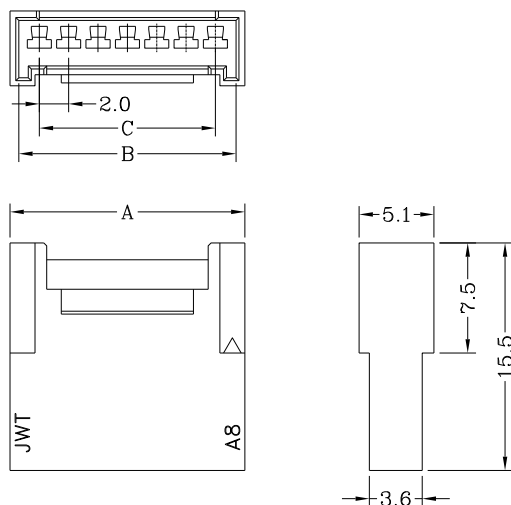

Dimensional Information:

Circuits	Dimensions			Pcs/Bag
	A	B	C	
2	6.0	4.8	2.0	1000
3	8.0	6.8	4.0	1000
4	10.0	8.8	6.0	1000
5	12.0	10.8	8.0	1000
6	14.0	12.8	10.0	1000
7	16.0	14.8	12.0	1000
8	18.0	16.8	14.0	1000
9	20.0	18.8	16.0	1000
10	22.0	20.8	18.0	1000
11	24.0	22.8	20.0	1000
12	26.0	24.8	22.0	1000