



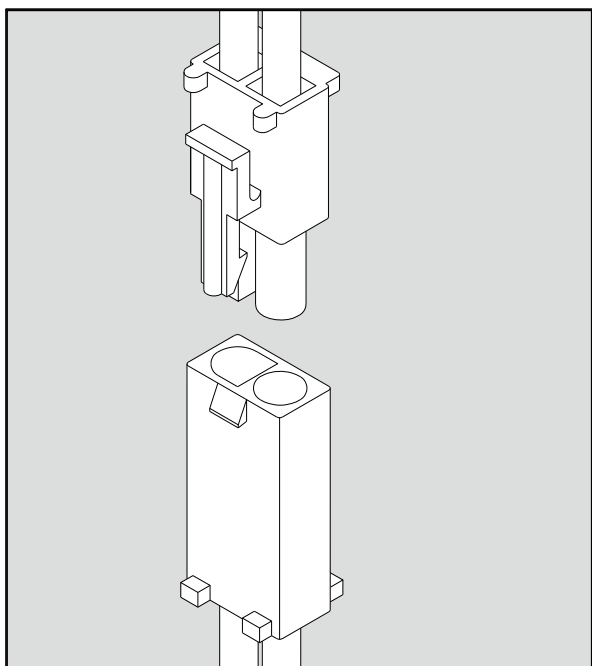

Assembly Layout

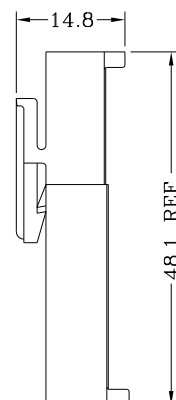

C

Specifications:

Poles	1~3 Poles
Plug Diameter	$\phi 2.36\text{mm}$
Rated Voltage	250V AC,DC
Rated Current	8A (AWG #16)
Withstand Voltage	800V AC/minute
Contact Resistance	10m Ω (MAX.)
Insulation Resistance	1,000M Ω (MIN.)
Temperature Range	-40 $^{\circ}$ ~+105 $^{\circ}$ C
Applicable Wire Range	AWG #14~#20



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

C2363 Series $\phi 2.36\text{mm}$ plug crimp terminal



Features:

* Used in JWT C2363 series socket

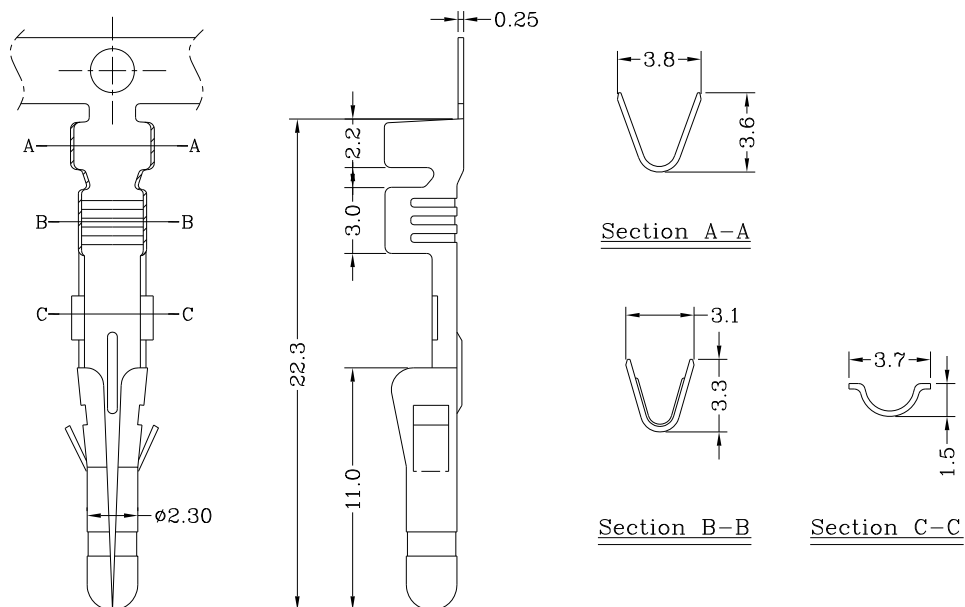


Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2363T0B-2	AWG #14~#20	2.80mm (max)	Brass	Tin-plated	5,000 PCS

C2364 Series $\phi 2.36\text{mm}$ receptacle crimp terminal

Features:

* Used in JWT C2364 series socket

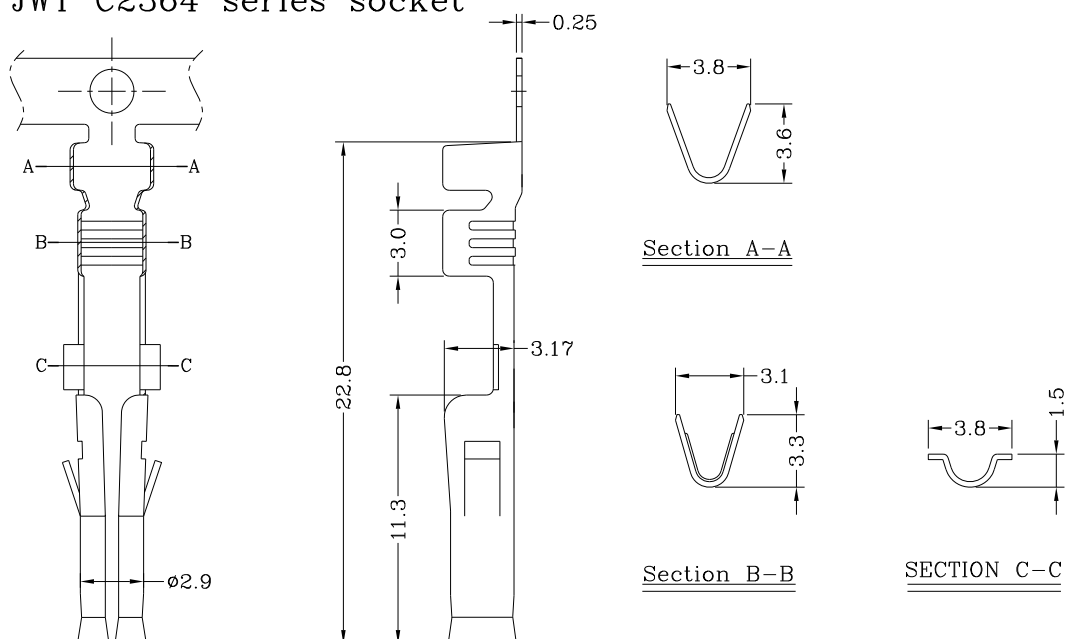

Specifications & Ordering Information:


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C2364T0B-2	AWG #14~#20	2.80mm (max)	Brass	Tin-plated	5,000 PCS

C2363 Series $\phi 2.36\text{mm}$ plug terminal socket



Features:

* Material : Nylon 66 UL 94V-2 (Natural)

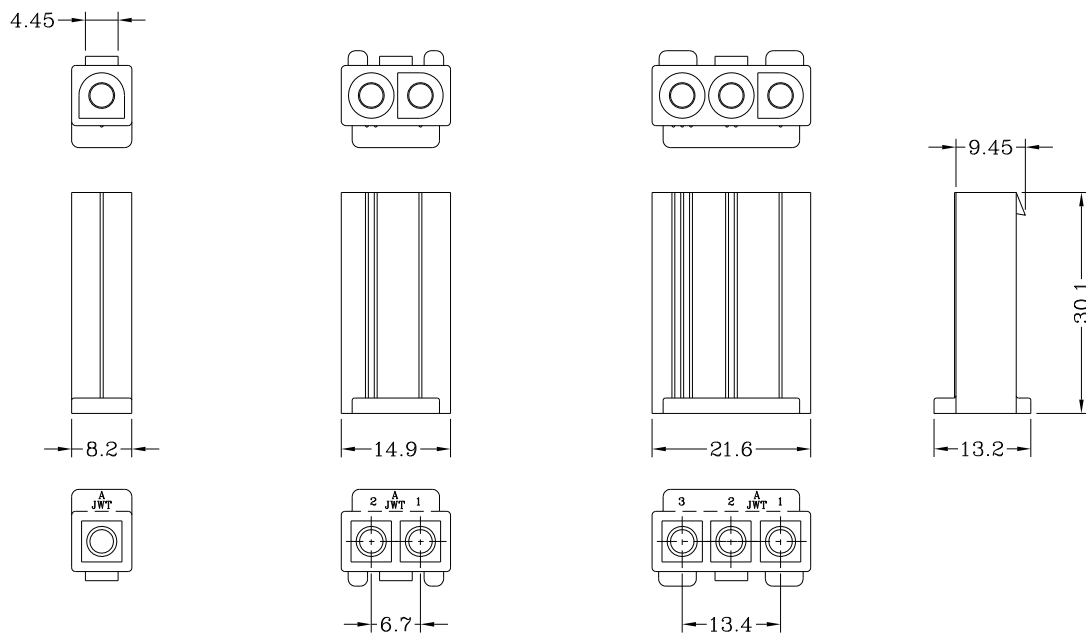

C2363H02-1P


C2363H02-2P

C2363H02-3P

C2364 Series $\phi 2.36\text{mm}$ receptacle terminal socket

Features:

* Material : Nylon 66 UL 94V-2 (Natural)

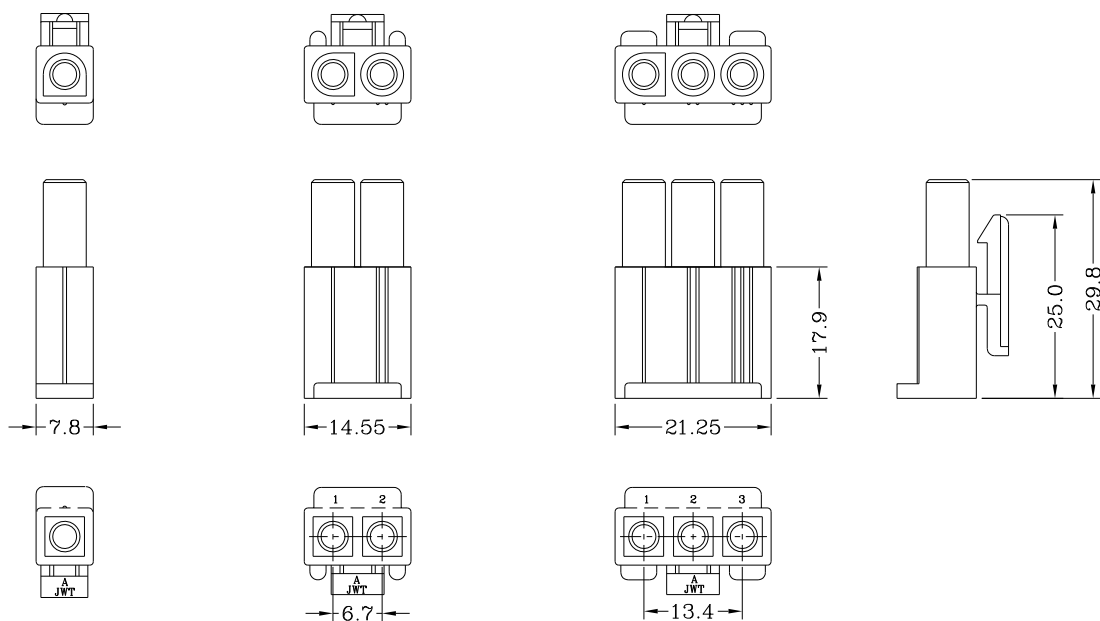

C2364H02-1P

C2364H02-2P

C2364H02-3P