



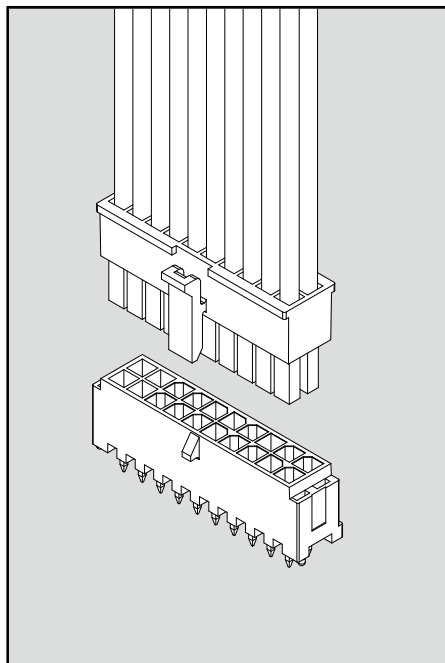


Assembly Layout

Straight-angle Type

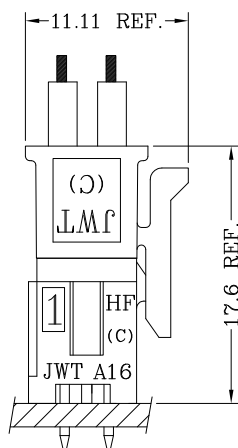

Right-angle Type

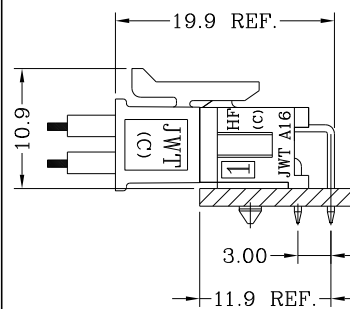

Specifications:

Poles	2~24 Poles
Pitch between poles	3.00mm
Rated Voltage	250V AC,DC
Rated Current	5A (AWG #20) 4A (AWG #22) 3A (AWG #24)
Withstand Voltage	1500V AC/minute
Contact Resistance	10mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-40°~+105°C
Applicable Wire Range	AWG #20~#24



RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

C3004 Series 3.00mm pitch dual row terminal socket



Features:

- * Material : Nylon 66 UL 94V-0 (Black)
- * Suitable for JWT C3004 series terminal
- * JWT P/N : C3004H00-2xNP

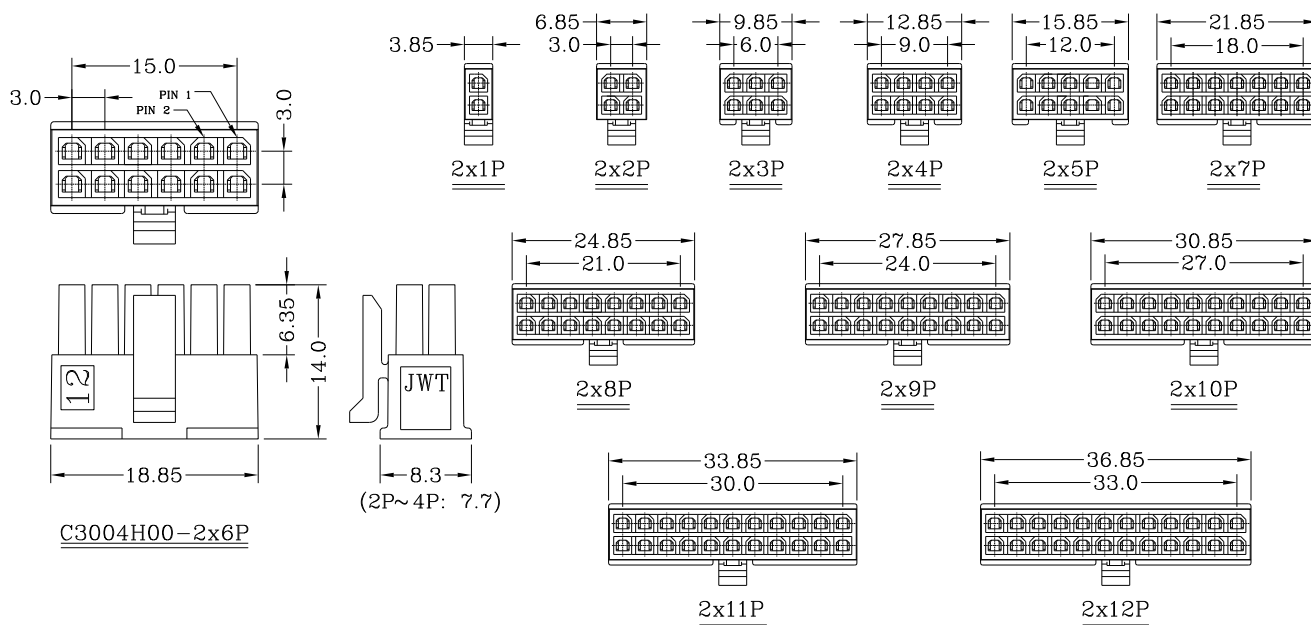


Note: For availability, delivery and MOQ, contact JWT.

C3004 Series 3.00mm pitch crimp terminal

Features:

- * Used in JWT C3004 series socket

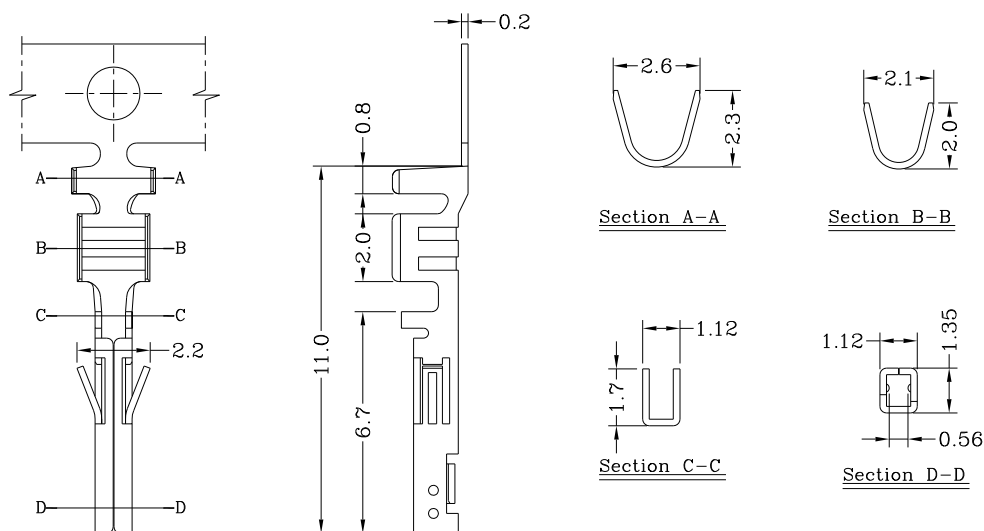

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C3004T0P-2	AWG #20~#24	1.85mm (max)	Phosphor bronze	Tin-Plated	10,000 PCS
C3004T0P-0*	AWG #20~#24	1.85mm (max)	Phosphor bronze	Au over Nickel	10,000 PCS




Note: 0* (eg. 00, 0A, 0B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.

C3004 Series 3.00mm pitch dual row (V-DIP) wafer



Features:

- * Material : Nylon 6T UL 94V-0 (Black)
Contact Post : □0.64mm Brass, Matte Tin Plated
- * Suitable for JWT C3004 series socket
- * JWT P/N : C3004WV0-2xNP

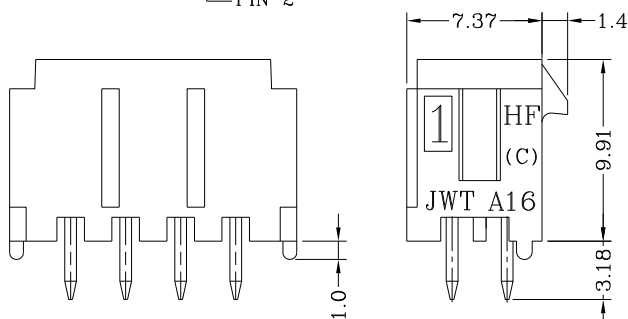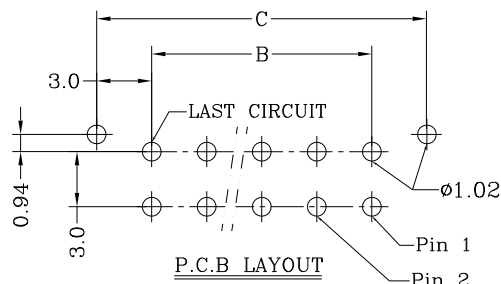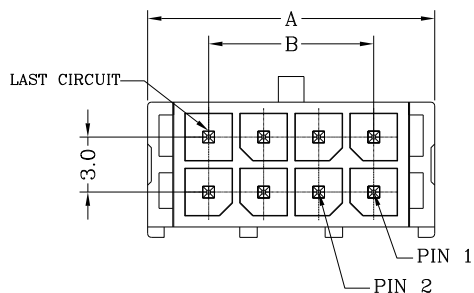




Dimensional & Ordering Information:

Circuits	Dimensions			PCS/BAG
	A	B	C	
2	6.65	—	6.00	1000
4	9.65	3.00	9.00	1000
6	12.65	6.00	12.00	1000
8	15.65	9.00	15.00	1000
10	18.65	12.00	18.00	1000
12	21.65	15.00	21.00	1000
14	24.65	18.00	24.00	500
16	27.65	21.00	27.00	500
18	30.65	24.00	30.00	500
20	33.65	27.00	33.00	500
22	36.65	30.00	36.00	500
24	39.65	33.00	39.00	500

C3004 Series 3.00mm pitch dual row (R-DIP) wafer

Features:

- * Material : Nylon 6T UL 94V-0 (Black)
Contact Post : □0.64mm Brass, Matte Tin Plated
- * Suitable for JWT C3004 series socket
- * JWT P/N : C3004WR0-2xNP

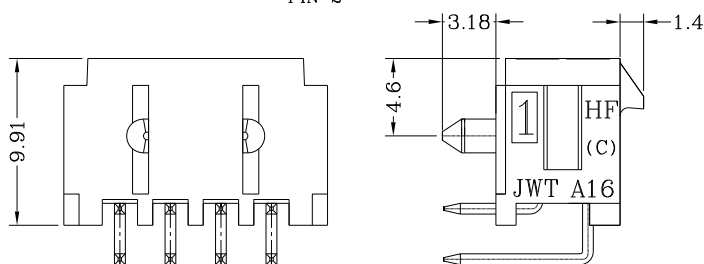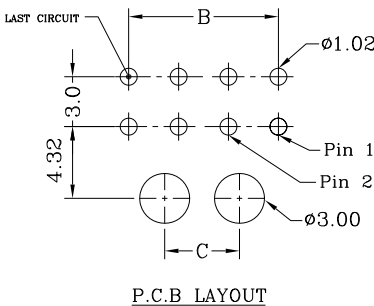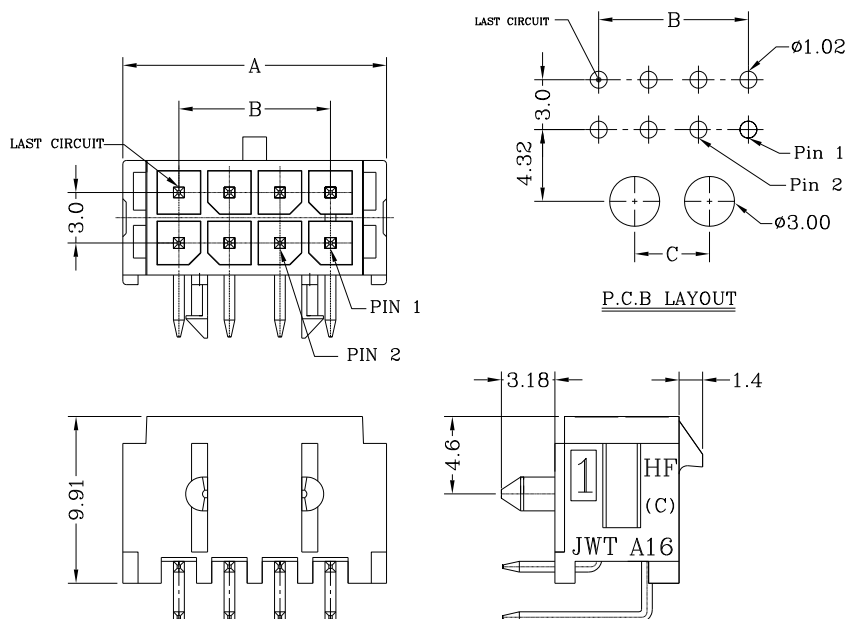

Dimensional & Ordering Information:

Circuits	Dimensions			PCS/Tray
	A	B	C	
2	6.65	—	—	490
4	9.65	3.00	—	330
6	12.65	6.00	—	250
8	15.65	9.00	4.70	200
10	18.65	12.00	7.70	170
12	21.65	15.00	10.70	150
14	24.65	18.00	13.70	130
16	27.65	21.00	16.70	110
18	30.65	24.00	19.70	100
20	33.65	27.00	22.70	90
22	36.65	30.00	25.70	80
24	39.65	33.00	28.70	80