



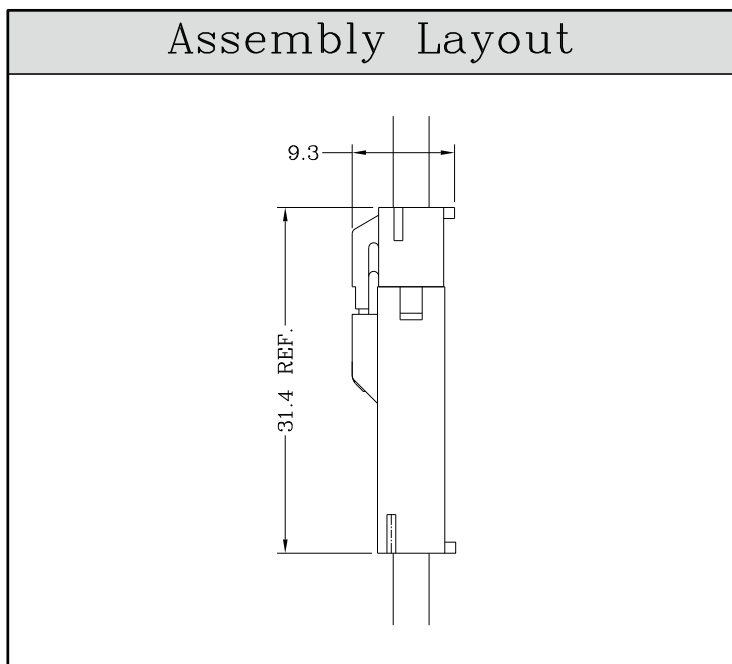

C

Specifications:


Poles	2 Poles
Pitch between poles	3.96mm
Rated Voltage	300V AC,DC
Rated Current	5A (AWG #20)
Withstand Voltage	1500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-25°~+85°C
Applicable Wire Range	AWG #20~#26

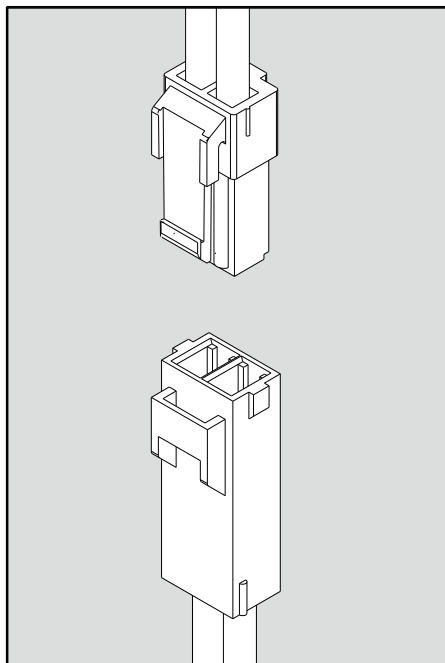

RoHS II-specification and Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

C3963 Series 3.96mm pitch crimp terminal socket



Features:


- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT C3963 series plug terminal
- * JWT P/N : C3963H00-2P

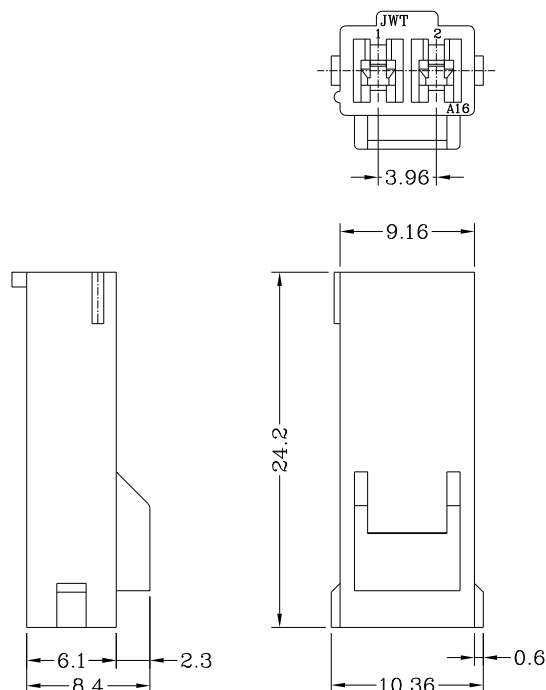

C3963 Series 3.96mm pitch plug crimp terminal

Features:

- * Used in JWT C3963 series socket

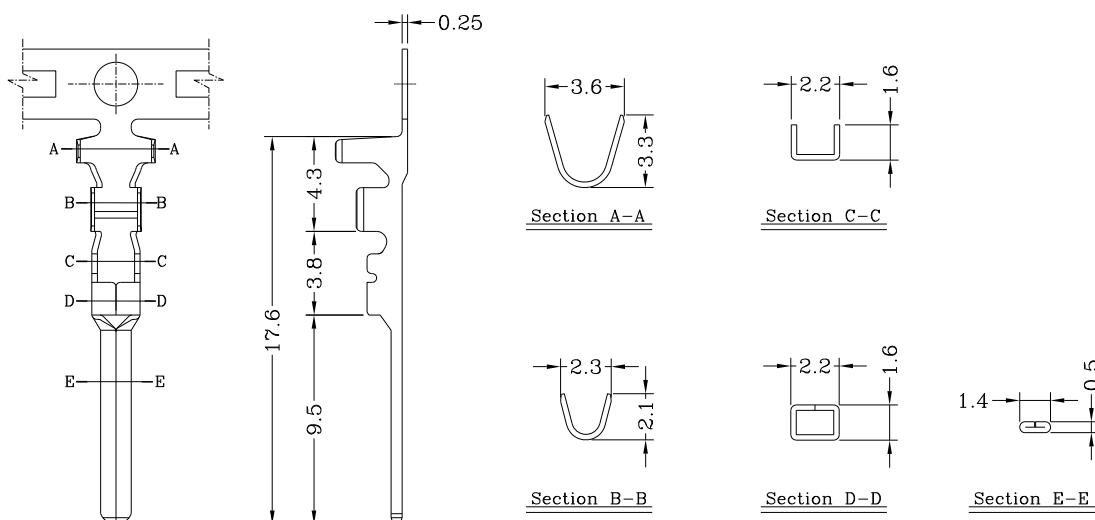

Specification & Ordering Information:


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C3963T0P-2	AWG #20~#26	2.50mm (max)	Phosphor bronze	Tin-plated	6,000 PCS

C3964 Series 3.96mm pitch crimp terminal socket



Features:


- * Material : Nylon 66 UL 94V-0 (White)
- * Suitable for JWT C3964 series terminal
- * JWT P/N : C3964H00-2P

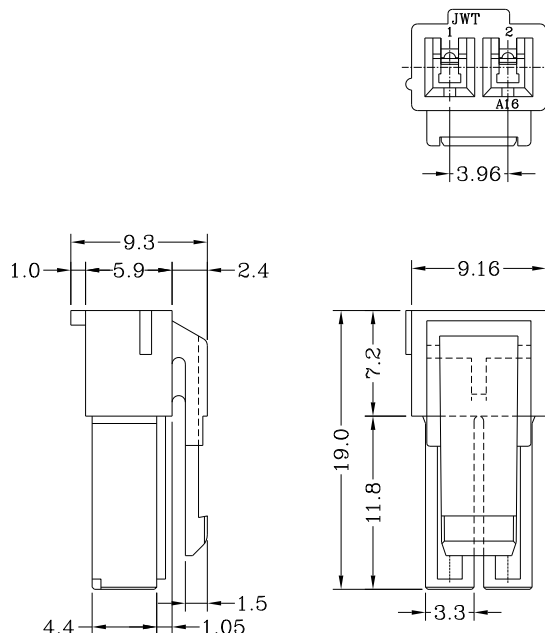

C3964 Series 3.96mm pitch receptacle crimp terminal

Features:

- * Used in JWT C3964 series socket

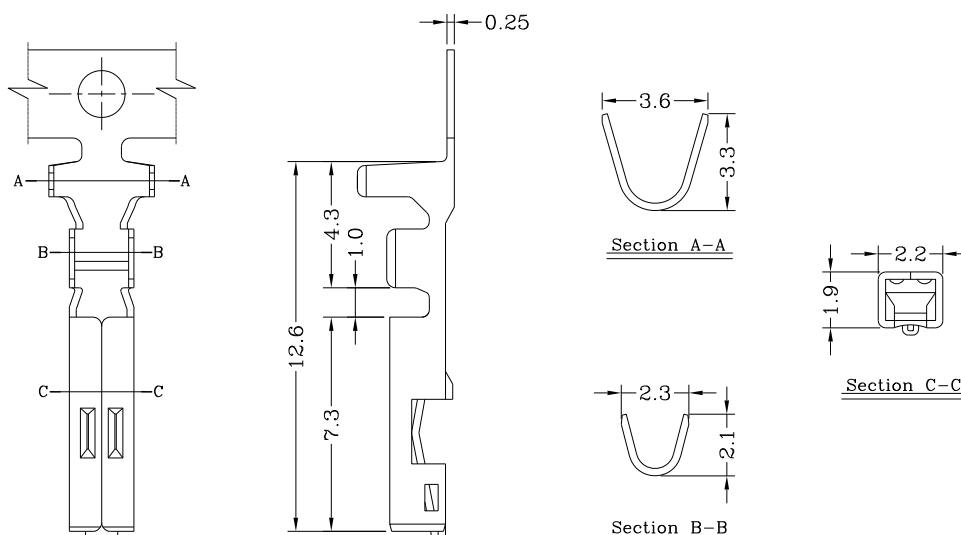

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C3964T0P-2	AWG #20~#26	2.50mm (max)	Phosphor bronze	Tin-plated	6,000 PCS