




Specifications:

Poles	2~20 Poles
Pitch between poles	1.50mm
Rated Voltage	50V AC,DC
Rated Current	2A (AWG #26)
	1A (AWG #28)
Withstand Voltage	500V AC/minute
Contact Resistance	20mΩ (MAX.)
Insulation Resistance	500MΩ (MIN.)
Temperature Range	-30°~+105°C
Applicable Wire Range	AWG #26

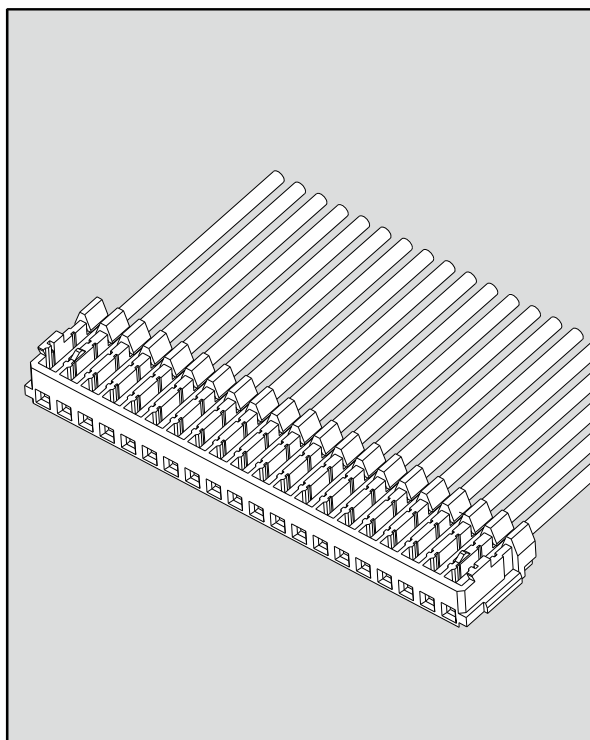

RoHS II-specification and
Halogen-free products.


Note: Not applicable to all parts. For specific safety
and compliance issues, contact JWT for details.

F

F1502 Series 1.50mm pitch IDC female connector

Features:

- * Material : Insulator: Nylon 66 UL 94V-0 +GF
Contact: Phosphor Bronze, Tin Plated
- * Applicable Wire Size : AWG#26
- * Insulation OD Range : $\phi 0.80 \sim 0.95\text{mm}$
- * JWT P/N : F1502HS0-NP-26

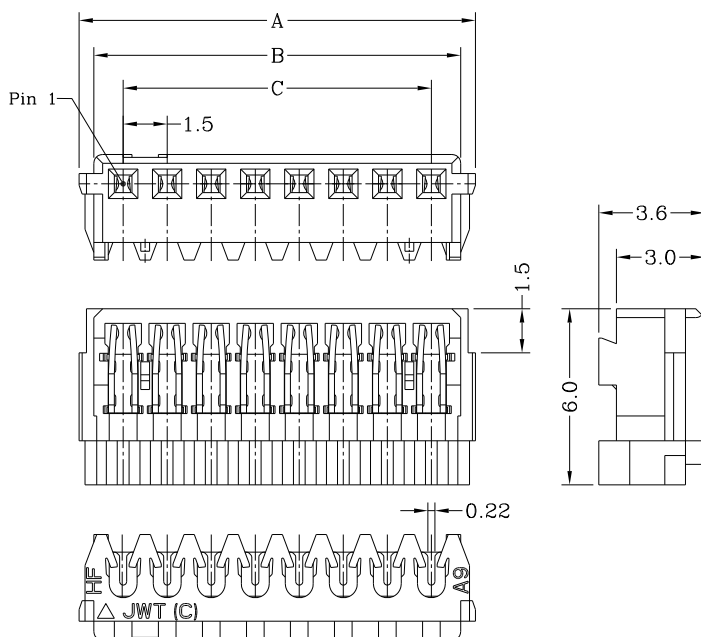

Dimensional & Ordering Information:

Circuits	Part No	Dimensions			Pcs/Bag
		A	B	C	
2	F1502HS0-2P-26	4.5	3.5	1.5	1,000
3	F1502HS0-3P-26	6.0	5.0	3.0	1,000
4	F1502HS0-4P-26	7.5	6.5	4.5	1,000
5	F1502HS0-5P-26	9.0	8.0	6.0	1,000
6	F1502HS0-6P-26	10.5	9.5	7.5	1,000
7	F1502HS0-7P-26	12.0	11.0	9.0	1,000
8	F1502HS0-8P-26	13.5	12.5	10.5	1,000
9	F1502HS0-9P-26	15.0	14.0	12.0	1,000
10	F1502HS0-10P-26	16.5	15.5	13.5	1,000
11	F1502HS0-11P-26	18.0	17.0	15.0	1,000
12	F1502HS0-12P-26	19.5	18.5	16.5	1,000
13	F1502HS0-13P-26	21.0	20.0	18.0	1,000
14	F1502HS0-14P-26	22.5	21.5	19.5	1,000
15	F1502HS0-15P-26	24.0	23.0	21.0	1,000
16	F1502HS0-16P-26	25.5	24.5	22.5	1,000
17	F1502HS0-17P-26	27.0	26.0	24.0	1,000
18	F1502HS0-18P-26	28.5	27.5	25.5	1,000
19	F1502HS0-19P-26	30.0	29.0	27.0	1,000
20	F1502HS0-20P-26	31.5	30.5	28.5	1,000