

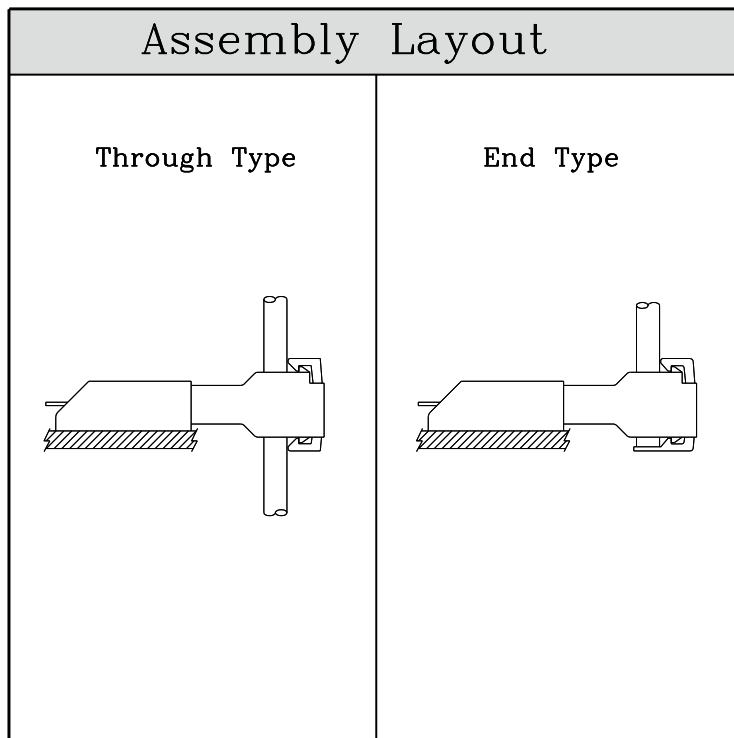


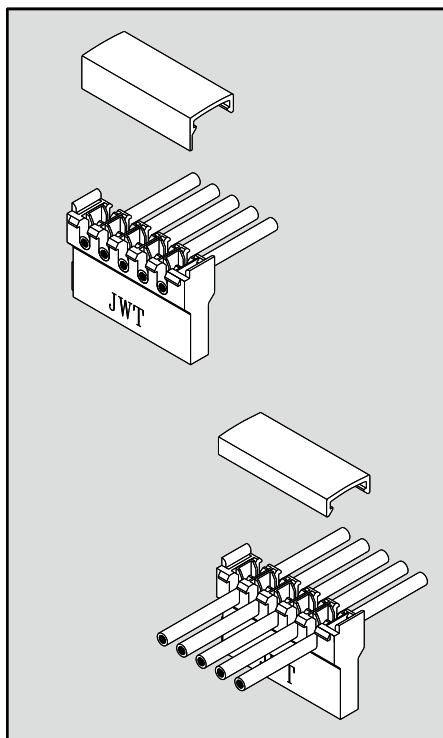

Specifications:

Poles	5 Poles (15P)
Pitch between poles	3.81mm (1.27mm)
Rated Voltage	30V AC/DC
Rated Current	1.5A AC/DC
Withstand Voltage	500V AC/minute
Contact Resistance	30mΩ (MAX.)
Insulation Resistance	1000MΩ (MIN.)
Temperature Range	-40°~ +85°C
Applicable Wire Range	AWG #18~#20

UL Recognized No. E144544



RoHS II-specification and Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

F6002 Series 3.81mm pitch SATA IDC connector



Features:

- * Material : Insulator: Nylon 66 UL 94V-0 +15%GF
Contact: Phosphor Bronze, Gold over Nickel
- * Suitable for UL 1007 Hook Wire AWG #18~20

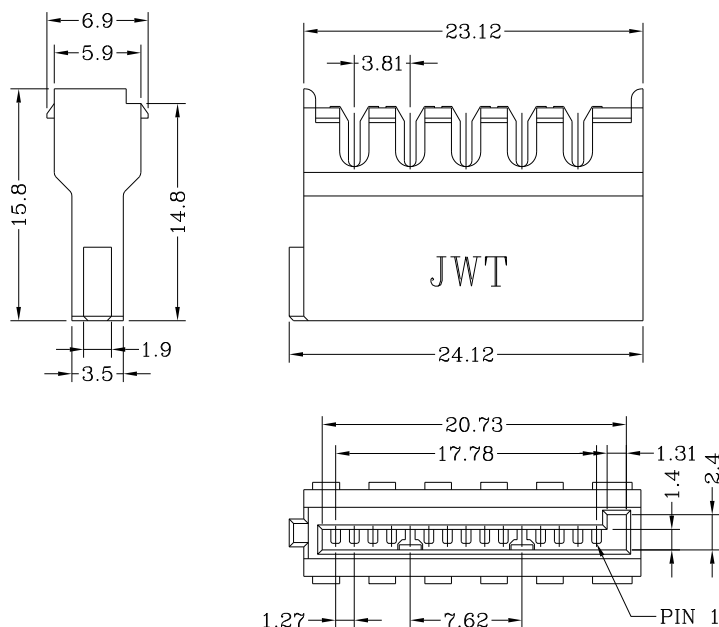

Ordering information:

$\frac{F6002}{1} \frac{HS0}{2 \ 3} - \frac{5P}{4} - \frac{**}{5} - \frac{*}{6}$


1. Series No.
2. HS: Housing Set
3. Flame Class
0: UL Rated 94V-0
4. No. of circuits
5. HF : Halogen-free products
6. 18 : Black (AWG #18)
20 : Yellow (AWG #20)

F


F6002 Series 3.81mm pitch SATA IDC connector cover

Features:

- * Material : Nylon 66 UL 94V-0

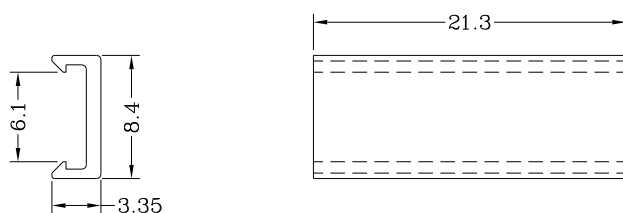

F6002C00

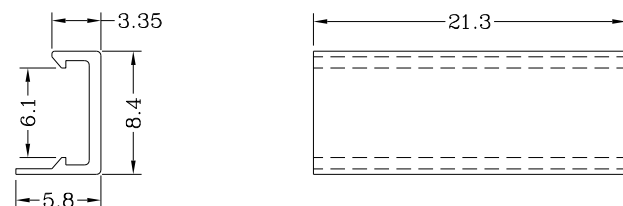

F6002CR0

Ordering information:

$\frac{F6002}{1} \frac{C}{2} \frac{*}{3} \frac{*}{4} \frac{-*}{5}$

1. Series No.
2. C: Cover
3. 0: Through type
R: End type
4. Flame Class
0: UL Rated 94V-0
5. (Blank) : Black (AWG#18)
E : Yellow color (AWG#20)