



B1611 Series $\phi 1.60\text{mm}$ Board-in terminal



* Applicable PCB Thickness: 1.60mm

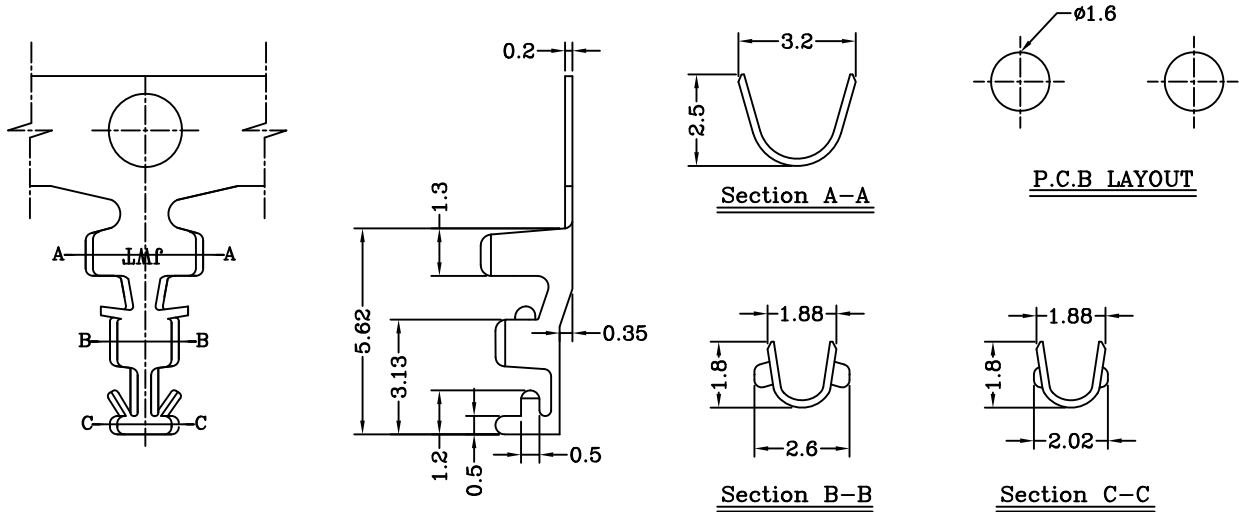


Specifications & Ordering Information:

| Part No | Wire Range | Insulation O.D. | Material | Finish | Qty/Reel | Note |
|-------------|-------------|-----------------|-----------------|------------------|-----------|-------------------------------|
| B1611TOP-2e | AWG #22~#26 | 1.95mm(max) | Phosphor bronze | Tin-plated | 8,000 PCS | e:Stamping before tin plating |
| B1611TOP-5e | AWG #22~#26 | 1.95mm(max) | Phosphor bronze | Matte Tin-plated | 8,000 PCS | |

B1611 Series $\phi 1.60\text{mm}$ Board-in terminal

* Applicable PCB Thickness: 1.60mm

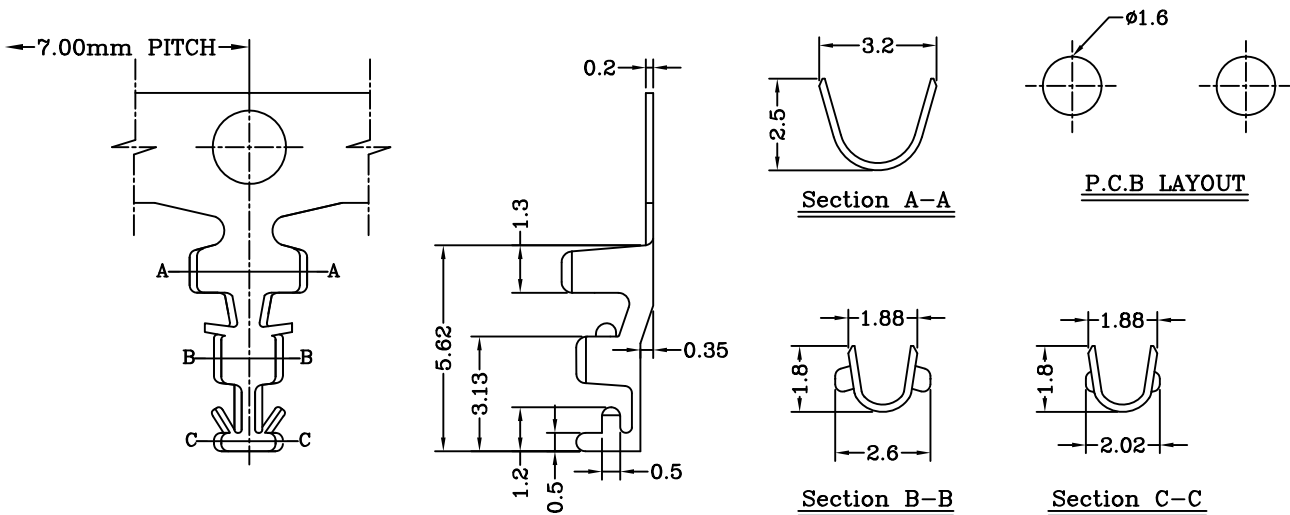

Specifications & Ordering Information:

| Part No | Wire Range | Insulation O.D. | Material | Finish | Qty/Reel | Note |
|--------------|-------------|-----------------|-----------------|------------------|-----------|-------------------------------|
| B1611TOP-2eS | AWG #22~#26 | 1.95mm(max) | Phosphor bronze | Tin-plated | 8,000 PCS | e:Stamping before tin plating |
| B1611TOP-5eS | AWG #22~#26 | 1.95mm(max) | Phosphor bronze | Matte Tin-plated | 8,000 PCS | |