



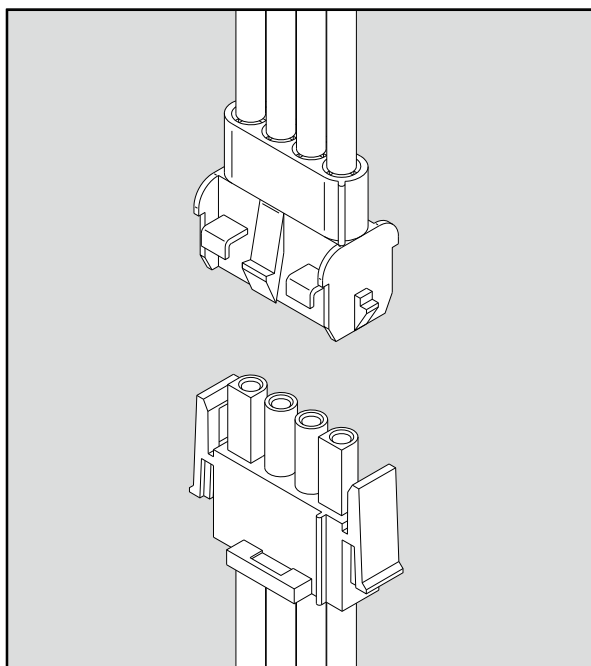

Assembly Layout

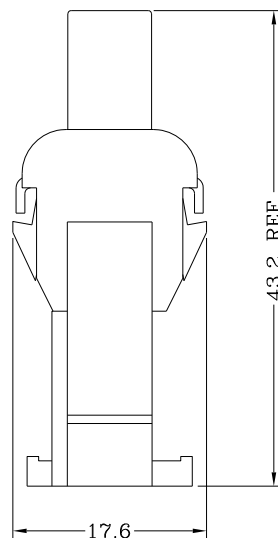

Specifications:

Poles	2~5 Poles
Pitch between poles	6.35mm
Rated Voltage	600V AC,DC
Rated Current	10A (AWG #14)
Withstand Voltage	5000V AC/minute
Contact Resistance	10m Ω (MAX.)
Insulation Resistance	1,000M Ω (MIN.)
Temperature Range	-25 $^{\circ}$ ~+85 $^{\circ}$ C

 UL Recognized No. E144544

 RoHS II-specification and Halogen-free products.


Note: Not applicable to all parts. For specific safety and compliance issues, contact JWT for details.

C6351 Series 6.35mm pitch plug terminal socket



Features:

- * Material : Nylon 66 UL 94V-2 (Natural)/ 94V-0 (White)
- * Suitable for JWT C6351 series terminal
- * Mates with JWT C6352 series receptacle
- * JWT P/N : C6351H0*-NP

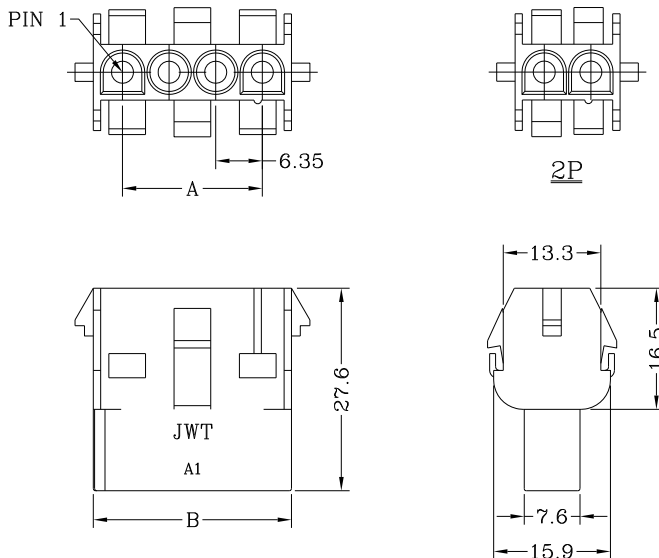


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	6.35	14.30	300
3	12.70	20.65	300
4	19.05	27.00	200
5	25.40	33.35	200

C6351 Series 6.35mm pitch plug terminal

Features:

- * Used in JWT C6351 series socket

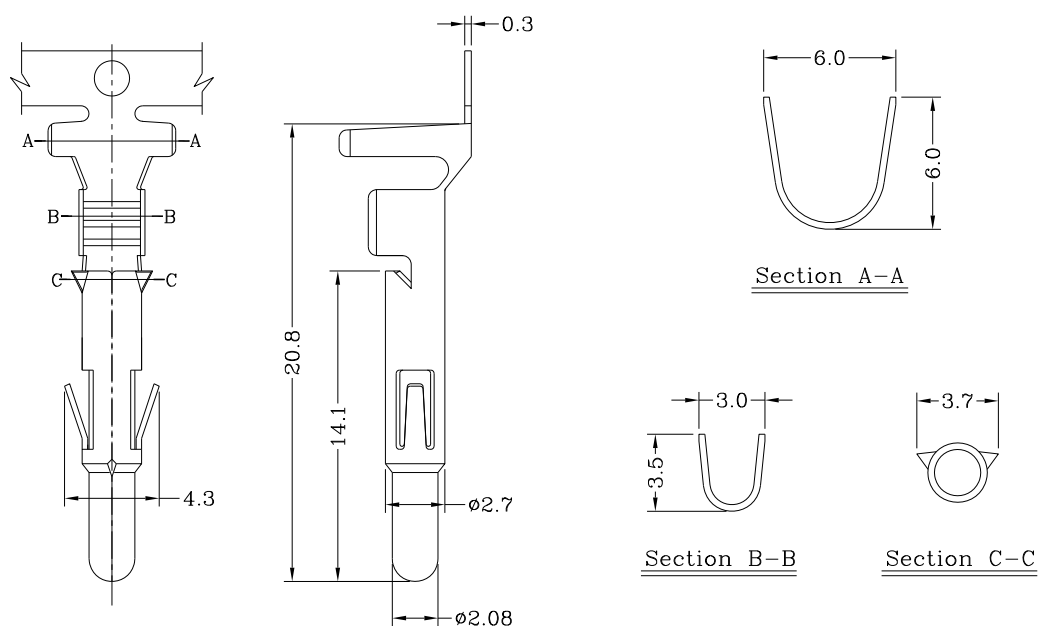

Specifications & Ordering Information:


Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C6351T2*-2	AWG #26x4 JUMP	4.80mm(max)	Brass or P. Bronze	Tin-plated	2,000 PCS

C6352 Series 6.35mm pitch receptacle terminal socket



Features:

- * Material : Nylon 66 UL 94V-2 (Natural)/ 94V-0 (White)
- * Suitable for JWT C6352 series terminal
- * Mates with JWT C6351 series plug
- * JWT P/N : C6352H0*-NP

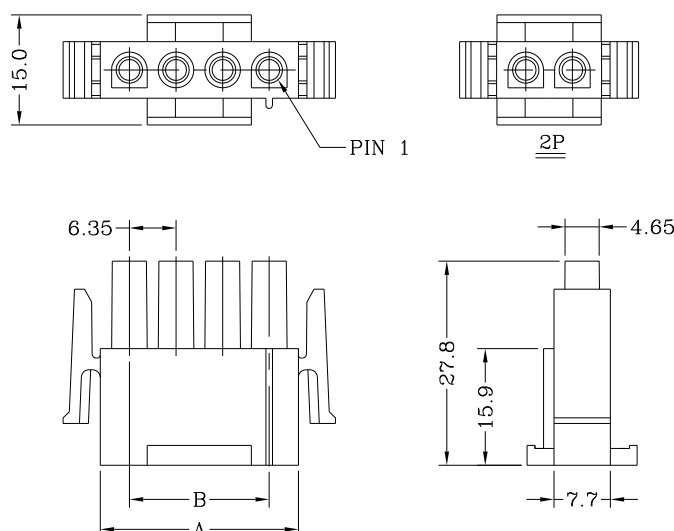


Dimensional Information:

Circuits	Dimensions		Pcs/Bag
	A	B	
2	14.30	6.35	300
3	20.65	12.70	300
4	27.00	19.05	200
5	33.25	25.40	200

C6352 Series 6.35mm pitch receptacle terminal

Features:

- * Used in JWT C6352 series socket

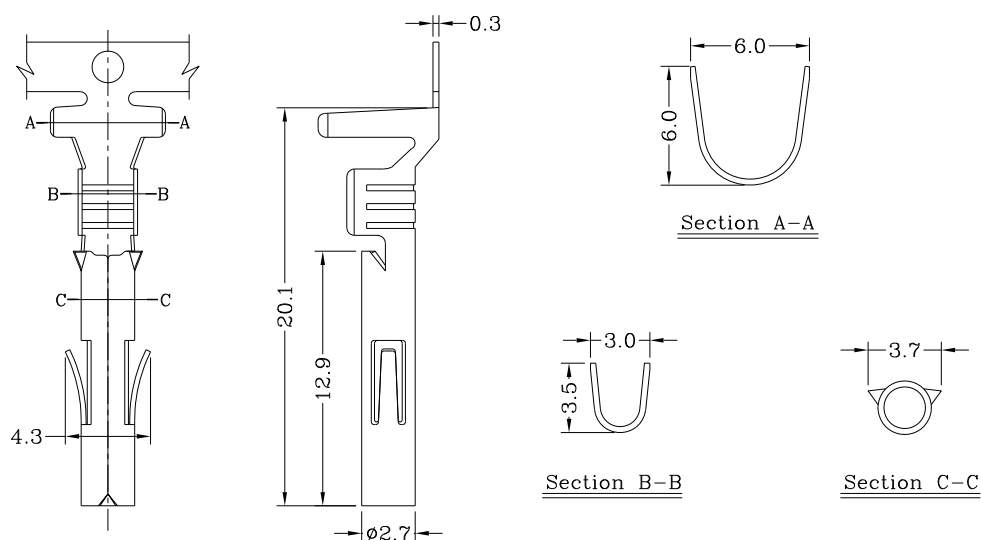

Specifications & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/Reel
C6352T2P-2	AWG #26x4 JUMP	4.80mm(max)	Phosphor bronze	Tin-plated	2,000 PCS
C6352T2P-0*	AWG #26x4 JUMP	4.80mm(max)	Phosphor bronze	Au over Nickel	2,000 PCS

Note: 0* (eg. 00, 0A, 0B...) designates Au-plate thickness identification.
For availability, delivery and MOQ, contact JWT.